

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

This Page Blank (uspto)

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

**0 312 980
A2**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **88117322.3**(51) Int. Cl.⁴: **B07C 3/14**(22) Date of filing: **18.10.88**(30) Priority: **20.10.87 US 111004**(43) Date of publication of application:
26.04.89 Bulletin 89/17(84) Designated Contracting States:
DE FR GB IT(71) Applicant: **EASTMAN KODAK COMPANY**
Patent Department 343 State Street
Rochester New York 14650(US)

(72) Inventor: **Radl, Bruce Mathew**
c/o EASTMAN KODAK COMPANY Patent
Department
Rochester New York 14650(US)
Inventor: **Lumia, John Joseph**
c/o EASTMAN KODAK COMPANY Patent
Department
Rochester New York 14650(US)
Inventor: **Gold, Bennett Ira, Dr.**
c/o EASTMAN KODAK COMPANY Patent
Department
Rochester New York 14650(US)

(74) Representative: **Blickle, K. Werner, Dipl.-Ing. et**
al
KODAK AKTIENGESELLSCHAFT Postfach
600345
D-7000 Stuttgart-Wangen 60(DE)

(54) **Apparatus for generating edge position signals for use in locating an address element on a mailpiece.**

(57) The edges of address elements such as address labels and window apertures located on a mailpiece, are detected by utilizing illumination from first and second alternating "on" and "off" light sources which illuminate the address elements at an acute angle. In the case of label detection, the edge closest to the on illuminating source generates a high contrast image, while the edge furthest from the "on" illuminating source is shadowed. In the case of illumination of an aperture, the opposite is true. That is, the light reflected from the edge which is furthest from illuminating source is high contrast, while edge closest to the illuminating source has a lower contrast. When the images generated due to edge illumination by the left and right light sources are subtracted from each other, the edges are further enhanced due to the fact that the remaining portions of the images cancel each other out.

EP 0 312 980 A2

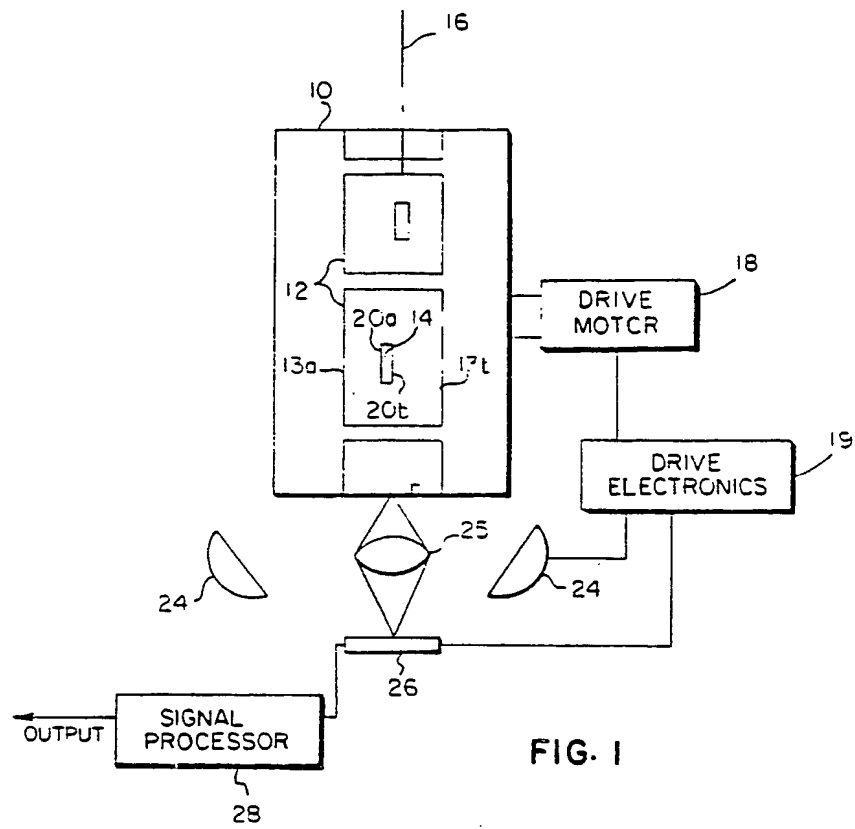


FIG. 1

APPARATUS FOR GENERATING EDGE POSITION SIGNALS FOR USE IN LOCATING AN ADDRESS ELEMENT ON A MAILPIECE**TECHNICAL FIELD**

5 The present invention pertains to apparatus and methods for generating signals which represent edge positions of address labels and apertures on an envelope for use in determining the locations of the labels and apertures for optical character reading.

DISCLOSURE OF THE INVENTION

10 For a number of years, optical character readers have been used at post offices to automatically read addresses containing city, state and zip code information. This address information is utilized to automatically sort incoming mail for delivery by mail carriers. However, since the position of the address on the envelope, as well as the size of the envelope may vary, it is necessary to first locate the address on each envelope before it can be optically read.

Presently, a significant number of the mailpieces utilize either address labels which are attached to the surfaces of the envelopes, or transparent windows through which the addresses are displayed.

20 In the present invention, signals are generated which represent the positions of the edges of labels and apertures for their use in locating the position of the address information on the mailpiece.

Conventionally, a number of detection systems have been disclosed. For example, in Maxey U.S. Patent No. 3,890,509 there is disclosed apparatus for detecting the edges of a sawn board by means of light directed at a low angle of incidence to the board, whereby the intensity of sensed light reflected from the board varies as a function of the locations of the board edges. Furthermore, Henderson, in U.S. 25 4,011,447 discloses a device for detecting the presence of a leading edge and trailing edge of a passing object, and whereby the passing object interrupts a predetermined portion of a light beam and causes a detector/amplifier to signal the presence of the object.

Other detecting devices include U.S. 3,932,755 by Sagawa which pertains to an apparatus for detecting sheets of paper in a pile for paper-feeding purposes whereby when there is only one sheet of paper in the pile, a light beam passes through the single sheet and is reflected at different levels from a high-level reflecting plate and low-level reflecting plate supporting the sheet.

In addition, Nakozawa et al. in U.S. 4,112,309 discloses apparatus for detecting the falls of an IC chip in which a laser beam is directed onto the surface of this moving chip and whereby the light is diffracted at 35 the falls to be detected by photosensing means.

The present invention pertains to apparatus and methods for generating a signal representing an edge of an address element, such as a raised label or a depressed aperture, which is located on a piece of mail. The edge position signals may be used for locating the position of the address element on the mailpiece for scanning by an optical character reader. The method includes the steps of providing the address element 40 which is located adjacent to a first horizontal surface of the mailpiece and which has a second horizontal surface as well as a vertical surface located between the first horizontal surface and the second horizontal surface in a manner to form the edge. The method further includes the steps of directing an illuminative output toward the mailpiece and address element at an acute angle to the first and second horizontal surfaces. Furthermore, there is included the step of detecting light which is reflected from the address 45 element and mailpiece in a manner that light reflected from the first and second horizontal surfaces generates first and second luminance signals of substantially equal levels, and light reflected from the vertical surface generates a third luminance signal having a level which is different than the levels of the first and second signals. An additional step includes generating first and second output signals of substantially equal levels in response to the first and second luminance signals in a manner that the first 50 and second output signals are associated with the locations of the first and second horizontal surfaces. In addition, there is generated a third output signal, having a level which is different than the levels of the first and second output signals, in response to the third luminance signal, and which is associated with the location of the vertical surface between the first and second horizontal surfaces.

It is therefore an object of the present invention to provide a system for generating a signal which

represents the location of an address element edge on a mailpiece.

BRIEF DESCRIPTION OF THE DRAWINGS

5

These and other objects and advantages of the present invention will become more readily apparent upon reading the following detailed description in conjunction with the attached drawings, in which:

Fig. 1 is a schematical block diagram overview of the label/aperture detection system for
10 generating edge position signals;

Fig. 2 shows light rays S_1T , S_2T and S_NT illuminating a point T on a plane P;

Fig. 3 is a simplified diagram of a label located on a planar envelope surface in order to illustrate the effect on surface luminance of grazing light which illuminates the raised label;

Figs. 4A and 4B are simplified diagrams showing how alternating light sources S_1 and S_2 produce
15 bright edges and shadows at opposite edges of the label and mailpiece;

Figs. 5A and 5B are simplified diagrams showing how alternating light sources, S_1 and S_2 , generate bright edges and shadows at opposite edges of an aperture and mailpiece;

Figs. 6A and 6B are idealized output signals of surface luminous intensity as a function of scanner pixel location for one scan of an envelope with an attached label, and more specifically Fig. 6A shows the
20 surface luminous intensity when the envelope is illuminated from a source to its left, and Fig. 6B shows the surface luminous intensity when the envelope is illuminated from a source to its right;

Fig. 7 is an idealized graph of an image difference signal as a function of scanner pixel location which is generated when the signals in Figs. 6A and 6B are subtracted from each other;

Fig. 8 is a flowchart showing the sequence of signal processing functions performed on the luminous
25 intensity signals up to and including their subtraction;

Fig. 9 is a visual image of the binarized difference data which is located below a picture of the corresponding mailpiece with attached label; and

Figs. 10A, B and C are flowcharts showing the sequence of signal processing functions performed on the difference signals to locate the positions of the label and envelope edges.

30

MODES OF CARRYING OUT THE INVENTION

35

Briefly, the present invention utilizes incoherent illumination generated at an acute angle to highlight edges of an address label or address aperture (window) of an envelope. This permits the position of the label or aperture to be determined so the address may read automatically by an optical character reader or the like.

As shown in Fig. 1, the principal elements of the present invention include a conveyor 10 for transporting mailpieces 12, having left, right parallel lengthwise extending edges 13a, 13b, and including thereon address labels 14 (or apertures), in a linear direction parallel to an axis shown by a line designated by the number 16. For purposes of the present invention, the term "label" is used to refer to a raised element which is attached to the surface of the mailpiece. On the other hand, the term "aperture" refers to
45 a typically rectangular opening in the mailpiece through which an address printed on a page inside the mailpiece appears. Furthermore, the words "label" and "aperture" are identified generically herein by the term "address element".

During movement of the conveyor 10 by means of a conventional drive motor 18 and conventional drive electronics 19, the left, right parallel lengthwise extending edges 20a, 20b of the labels are illuminated by a
50 pair of strobe lamps 24, with the resulting image of the address element being focused by a conventional lens system 25 onto a conventional image sensor 26 which is located above the mailpiece and which scans in a linear direction normal to axis 16. Sensor 26 converts the incoming images to electrical signals which are processed and enhanced by a signal processor 28 for their later use, i.e., to determine the location of the address element on the mailpiece.

In order to better understand the present invention, an analysis of the effect of lighting angle on edge brightness is presented. With reference to Fig. 2, three light sources, S_1 , S_2 , S_N are shown illuminating an ideal diffuse (Lambertian) white surface P. For sources S_1 , S_2 and S_N of equal light intensity, the illumination E_T produced at an underlying point T on surface P by grazing light from source S_1 , for

example, is proportional to the cosine of an angle θ ; where θ is an angle measured between a ray S_1T generated from source S_1 and a ray S_NT which is generated normal to plane P from the light source S_N . In other words, the illumination $E_{\theta 1}$ of point T by light source S_1 is found by the equation $E_{\theta 1} = E_0 \cos \theta$, where E_0 is the illumination generated at point T by light source S_N .

5 It is further known that illumination E_{θ} (candles per sq. ft.) = luminance \times reflectance/ π . Neglecting reflectance losses, i.e., reflectance is set equal to one, then $E_{\theta} = \pi L_{\theta}$, where L_{θ} is the value of surface luminance. By substitution, $L_{\theta} = (E_0/\pi) \cos \theta$.

Therefore, denoting surface luminance of point T due to S_1T and S_NT as L_1 and L_N respectively, we determine that $L_1 = (E_0/\pi) \cos \theta$ and $L_N = E_0 \cos(0^\circ)/\pi = E_0/\pi$.

10 Now, in order to formulate an expression for the label edge illumination as a function of the light angle θ , reference is made to Fig. 3 which shows a magnified side view of the address element (label) 14 having a top horizontal surface 32 and vertical side surface 34 which intersects with top surface 32 at the edge 20. In this embodiment, the label is located on a mailpiece having a top horizontal surface 35 and left, right vertical sides 36a, 36b; the intersections of the side surfaces 36a, 36b with the top surface 35 forming the
15 left, right edges 13a, 13b. For the purpose of the present description, it should be appreciated that the terms "horizontal" and "vertical" are used to describe relative locations of the elements to each other rather than describing their positions in an absolute sense.

At a point A on the top surface 32 of the label, its surface luminance is expressed by the equation $L_A = (E_0/\pi) \cos \theta$, where L_A is the luminance of point A due to source S_1 . Furthermore, at a point B on the
20 vertical side 34 which is also illuminated by light source S_1 , its surface luminance, L_B , is expressed by the equation $L_B = (E_0/\pi) \cos (90 - \theta)$, where $(90 - \theta)$ is the angle of the light rays S_1T illuminating point B . This angle θ is measured from an imaginary line designated by the number 36 which is normal to vertical side 34. Since the contrast (brightness) of edge 20 is a function of the ratio L_B/L_A , this ratio can be expressed by the equation $L_B/L_A = [(E_0/\pi) \cos (90 - \theta)]/[(E_0/\pi) \cos \theta] = \tan \theta$.

25 It is apparent, therefore, that there is a difference in surface luminance between i) the vertical side 34, and ii) the horizontal top surface 32 of the label and the horizontal surface 35 of the mailpiece as a result of light which is incident at an acute angle to these surfaces 32, 35; the luminance of the mailpiece surface 35 being approximately equal to the luminance of label surface 32. It is furthermore apparent from knowledge of the tangent function that this contrast in surface luminance increases with increases in the angle θ above
30 45° . That is, the luminance of side 34 increase over that of horizontal surfaces 32, 35 with an increase in angle θ when θ is greater than 45° . It is this difference in surface luminance between the side surface 34 and horizontal surfaces 32, 35 which is utilized in the present invention to locate the edge of the label.

In order to detect the edges of the envelope and label, in the present embodiment shown in Fig. 4, two light sources, S_1 and S_2 , located outboard of the lengthwise extending edges 13 of the envelope, are
35 utilized. In a preferred embodiment, the "on" periods of the lights S_1 and S_2 are alternated, with the signals formed by the detected difference in luminance due to each alteration being subtracted from each other to generate an output signal which is representative of locations of the envelope edges and label edges.

More specifically, utilizing alternating light sources, light from the left lamp S_2 illuminates the left side 36a and top surface 35 of the envelope, as well as the left side 34a and top surface 32 of the label. This
40 results in high level contrast signals being developed to distinguish edges 20a, 13a, in the manner discussed previously with reference to Fig. 3. At the same time, source S_2 creates a shadow, shown by dashed lines identified by the numbers 40b, beyond the opposite right label edge 20b and envelope edge 13b, so that effectively almost no light is reflected from label right side 34b and envelope right side 36b. This results in much lower contrast signals being developed to distinguish label right edge 20b and
45 envelope right edge 13b. In this embodiment, light sources S_1 and S_2 are "on" for equal periods of time during each alteration, with the resulting contrast image being detected by the imager 26.

Alternating the lamps produces the opposite effect as shown in Fig. 4B. That is, when right lamp S_1 is "on" and the left lamp S_2 is "off", the envelope side 36b and label side 34b closest to source S_1 are illuminated. However, shadows are generated beyond the opposite label edge 20a and envelope edge 13a
50 thereby effectively masking label left side 34a and envelope left side 36a. Thus, when source S_1 is "on", high level contrast signals are developed to distinguish right edges 20b, 13b, and lower level signals are generated to distinguish left edges 20a, 13a. When the contrast signals generated by illumination of the envelope and the label are stored in the memory of processor 28 and then subtracted from each other, the resulting difference image is one which has enhanced amplitude portions which correspond to the left, right
55 edges of the envelope and label, while the remainder of the image cancels itself out. This will be explained in greater detail shortly.

In the case when an aperture is illuminated, the results are slightly different. As shown in Fig. 5A, the aperture indicated at 42 includes a bottom surface 44, which typically might be a paper inside the

mailpiece, and left, right sides 46a, 46b which upstand from the bottom surface 44 and which intersect with mailpiece top surface 35 to form left, right edges 48a, 48b. Thus, when the aperture 42 is illuminated by the right source S_1 , for example, the mailpiece right side 36b is illuminated and the mailpiece left side is shadowed. However, at the same time, the aperture left side 46a is illuminated and the aperture right side 46b is shadowed as shown by the dashed line 40b'. Alternating the light sources so that S_1 is "off" and S_2 is "on", produces the opposite result as shown in Fig. 5B. However, when the aperture edge contrast signals generated due to illumination from the left and right sources are subtracted from each other, only the portions of the signal corresponding to the edges are enhanced, with the remaining portions of the signal cancelling each other out. For reasons which will become clearer shortly, this was the case previously with reference to Figs. 4A and 4B when the label was illuminated.

The generation of edge position signals is set forth in greater detail with reference to Figs. 6A and 6B. In Fig. 6A, there is shown a graph of contrast intensity as a function of imager pixel location due to the operation of left lamp S_2 during a single scan of a label and envelope. On the other hand, in Fig. 6B, there is shown a graph of contrast intensity as a function of imager pixel location due to operation of right lamp S_1 . As can be seen in Figs. 6A and 6B, the contrast intensities of a majority of the flat area of the envelope and label including envelope top surface 35, label top surface 32 and aperture bottom surface 44, remain essentially constant except for area of text, i.e., address information, which is indicated by signals S_{TEXT} , S'_{TEXT} in Figs. 6A and 6B. When illuminated by the left light S_2 , the label left edge 20a and envelope left edge 13a generate increased contrast intensity signals S_{LENV} and S_{LLAB} (Fig. 6A) at pixel positions A and B. At the same time, the shadowed label right edge 20b and the shadowed envelope right 13b generate low intensity contrast signals S_{RLAB} and S_{RENV} at pixel positions C and D. On the other hand, when illuminated by the right light S_1 , label, envelope right edges 20b, 13b, generate increased contrast intensity signals S_{RLAB} and S_{RENV} at positions C' and D' as shown in Fig. 6B, while the shadowed label left edge 20a and shadowed envelope left edge 13a generate much lower contrast intensity signals S'_{LLAB} and S'_{RLAB} at positions A' and B'.

It should be noted that positions A', B', C', and D' of Fig. 6B represent a slight shift from positions A, B, C, and D of Fig. 6A due to movement of the envelope during the time the address element is illuminated from the left and right sources. However, since the amount of movement during this time is so slight, little error is introduced when the signals of Figs. 6A and 6B are subtracted.

It should be appreciated that each pixel address may be generated in processor 28 by means of a line counter which generates a new count for each line scanned by the imager 26, as well as by a pixel counter which generates a new count for each pixel scanned. These pixel positions may be stored in a frame store and recalled later to provide the address locations of the edges.

When the contrast intensity signals represented in the graphs in Figs. 6A and 6B are subtracted from each other and the absolute value of the signal is determined, a signal $|\Delta S| = |S_2 - S_1|$ shown graphically in Fig. 7 is generated. In this manner, the contrast intensity signals representing the positions of the label edges and envelope edges are enhanced, while the contrast intensity signals representing the remaining flat areas of the label and envelope, as well as text information, cancel each other out. For example, the high level signal S'_{RENV} (Fig. 6B), which represents the right edge of the envelope at position D' when illuminated by the right light source S_1 , is subtracted from the lower level signal S_{RENV} , which represents the left edge of the envelope at position D when illuminated by the left light source S_2 . This generates an even greater enhanced difference signal. More specifically, further enhancement of the edge signals result due to the cancelling out of the text and non-edge related information. That is, prior to subtraction, the differences (Fig. 6A) in amplitudes between the contrast signals representing the flat areas of the label/aperture and the upper extent of the edge signals may be represented by a distance ΔY . However, after subtraction, this difference in amplitudes between the flat areas and the upper limit of the edge signals is represented by the distance ΔZ in Fig. 7 which is greater than ΔY due to mutual cancellation of the flat areas. Thus, an improved signal for locating the edges is provided.

Having provided an overview of the present invention, the details of its implementation now will be discussed. Scanning of the mail pieces is accomplished by the imager 26 which in an exemplary embodiment is a digital camera such as the Eikonix Model 78/99. This camera is a high resolution linear array digital camera with 2,048 photodiode elements which are located generally perpendicular to axis 16. In this embodiment, the mailpiece is stationary and the array is mechanically driven by means of a stepper motor (not shown) in a direction parallel to axis 16 to acquire image plane information in two dimensions. Each element returns a signal intensity which is digitized into 12 bits. In this embodiment, a field is divided into 2,048 lines with each mailpiece being scanned twice; that is, once when illuminated from the left by source S_2 and once when illuminated from the right by source S_1 . Assuming that the velocity of each mailpiece along conveyor 10 is about one hundred inches per second, a resolution of at least two hundred

and fifty samples per inch is required.

Illumination of the mail pieces is accomplished by the lamps 24 which are positioned above and at opposite sides of the conveyer 10. In an exemplary embodiment, each lamp 24 is a 120V, 250W tungsten-halogen light bulb located in close proximity to a metal reflector. An optimum angle θ of illumination is selected to be between about 65° and 75° , and preferably about 70° . Illumination angles much greater than 75° provide increased intensity signals, however, this also can result in spurious signals in the event the mailpiece is creased or slightly bent. Assuming that the linear array imager samples at a rate of ten lines per inch, each source S_1 or S_2 flashes for equal periods at a rate of about one thousand flashes per second.

Referring now to the flowchart in Fig. 8, image signals from the image sensor generated due to illumination by the left source S_2 and right source S_1 are fed along separate channels to the signal processor 28. In this description, the left channel blocks are identified by numbers with an "a" suffix attached, and the right channel blocks are identified by numbers with a "b" suffix attached. In an exemplary embodiment, the processor 28 includes a MicroVax II minicomputer manufactured by Digital Equipment Corp., which is interfaced with a CSPI Mini Map array processor to process the left and right channel data in separate files. Initially, luminous signals for each file of data from the imager 26 are put through a logarithmic look-up table at blocks 48 and converted to their logarithmic base ten equivalent. This conversion increases the contrast of the image signals in the darker areas of the mailpiece, while lowering their contrast in the lighter areas of the mailpiece. This lessens the effect of shadows caused by folds, creases, etc. in the mailpieces. Further image enhancement is accomplished by encoding the image signals in a conventional manner in gray scale from 0 through 255 at blocks 50.

Subsequently, each line is conventionally Fourier transformed in two dimensions at blocks 52, then filtered at blocks 54 to remove all low frequencies, i.e., signals typically related to false edges such as bends or creases, and then inverse Fourier transformed back at blocks 56. Image processing utilizing a Fourier transformation and subsequent filtering are discussed in Digital Image Processing, R. C. Gonzalez, 1977, pp. 36-88; as well as Digital Image Processing Techniques, M.P.

Ekstrom, 1984, pp. 18-25, the contents of Digital Image Processing and Digital Image Processing Techniques being incorporated herein by reference.

Upon conclusion of the aforementioned image signal preprocessing, the left and right luminous signals are subtracted as discussed previously at subtractor block 58. After the resulting difference signals are calculated, the absolute value of those difference signals are then determined to produce a measure of the difference in intensity levels.

Further image processing of the difference signal is then accomplished in order to better separate the edge signal portions from any remaining noise and spurious signals such as those caused by shadows, creases or folds in the mailpiece, and to generate more accurate edge position information. More specifically in the present invention, prior to connected component encoding, the data is binarized so as to define all of the difference levels in terms of either a bright code or a dark code. Binarization in conjunction with connected component digital image processing is also described in Digital Imaging Processing Techniques at pages 274 to 279. Referring now to the flowchart beginning at Fig. 10A, a binarization intensity threshold of about 170 is selected at flowblock 64. This threshold has been determined to adequately reflect the intensity difference that corresponds to an edge. Beginning with the difference intensity value representing the first pixel position of the first scan line, and proceeding through pixels one through n of each line one through m, a determination at decision block 66 is made whether these values exceed the selected threshold. Each eight bits of intensity data is then reassigned a new value. That is, all of those intensity signals which exceed the threshold are assigned a "bright" (such as binary one) common code value at flowblock 68 in place of their intensity level data; whereas those intensity signals which do not exceed the threshold are assigned a common "dark" code (such as binary zero) at flowblock 69. In this manner, all of the pixel positions are either represented by a bright code value or a dark code value. A visual representation of the binarized data positioned below the mailpiece 12 and label 14 is shown in Fig. 9 where the black areas identified by the letter "B" correspond to label codes which exceed the binarization threshold, and the remaining white areas identified by the letter "W" correspond to label codes which do not exceed the binarization threshold.

To better determine where the edges lie, boundary determination techniques such as the conventional procedure of connected component processing are utilized. Connected component encoding is also discussed in Digital Image Processing at pages 347-348. In this manner, contiguous points (binarized data) in the image plane which have similar properties are used to define a boundary or edge. In order to accomplish this, code values from flowblock 69 are reexamined at flowblock 70 to determine whether the pixel code under test has a bright code neighbor as set forth in conventional eight-connectedness criteria.

All label codes which meet this criteria, i.e., are determined to be connected, are assigned common label codes at flowblock 72, and referred to herein as "blobs". These blobbed label codes are then examined at a flowblock 74 to determine whether there are any closely spaced blobs having different label codes. If it is determined at flowblock 76 that two blobs are closer than about one quarter of an inch, these closely spaced blobs are assigned common label codes at flowblock 78.

Further processing involves establishing maximum and minimum blob sizes at flowblock 80. That is, it is determined that blobs having pixel sizes less than about 80 pixels are not large enough to represent edges; and if greater than about 4,000 pixels, are too large to represent label edges (most likely representing spurious shadows). Thus, at decision bloc, 82, if it is determined that a blob is above the maximum blob size (blobmax) or under the minimum blob size (blobmin), that blob is eliminated from further consideration. This reduces the number of blobs down to a range between about five and about thirty.

A blob which is within the aforementioned parameters is further processed at flowblock 84 to determine its orientation along its major axis. Orientation of each blob is determined in a conventional manner by calculating the eigenvectors of the second-moment matrix of the blob.

Once the orientation of the blob is determined, then the extreme left pixel position and extreme right pixel position of each blob is identified at block 86. This in effect determines the left and right sides of the outer perimeter of a quadruped which represents the label/aperture. Further merging of the blobs is accomplished at flowblock 88 by merging those blobs which have extreme left or right side pixels within about one quarter of an inch of each other to further reduce the remaining blob count. With regard to the merging of the blobs utilizing the extreme points, the blobs are first processed to determine their center of mass, their extreme points and their rough orientation, i.e., the slope of the dominant eigenvector of the second-moment matrix. In the process of merging, their masses are added, their extreme points are modified, and their orientation is recomputed as a weighted average.

The remaining processing steps involve defining pairs of remaining blobs which may represent possible left and right edges of the label/aperture, and then selecting the blob pair which is most likely to represent the label/aperture sides. More specifically, at flowblock 90, a determination is made whether two or more blobs are parallel to each other. If this test is satisfied, then the blob pair is considered a candidate left and right edge. Further reduction in the number of candidate blob combinations is accomplished by eliminating those parallel blob combinations that are too close or too far apart. That is, those blob pairs that are closer than about one half inch or further apart than about four inches and which therefore do not fall within the likely distance parameters between left and right edges of a label/aperture, are eliminated from further consideration at flowblock 92.

For the purpose of the present invention, parallel blobs are defined to be those which are parallel to each other within a tolerance of about plus or minus 30° so as to include those apertures having rounded edge corners. Also, to insure that the quadruped determined by two parallel blobs is rectangular, either the corresponding tops or bottoms of the blobs are required to be no more than 25 lines (1") apart.

From the remaining parallel blob combinations, the most probable combination which represents the left and right edges of the label are selected. Typically, this is accomplished by comparing each of these combinations to a preselected criteria for likely location, size and orientation of a label on a mailpiece. For example, a true label/aperture is probably near the center of the mailpiece and most probably aligned with the edges of the mailpiece. The blob combination which most closely corresponds to these sets of criteria is selected as being representative of the left and right edges of the label/aperture at flowblock 94.

The location of the label/aperture on the mailpiece is then obtained by outputting at flowblock 96 the line and pixel counts from memory which correspond to the selected left and right edge blobs.

Attached hereto as Appendix A is a detailed listing of the program set forth in flowchart form in Figs. 8 and 10.

Appendix A

```

program label_process
implicit none

byte bdata(2048,256)
byte bout(1024,256)
equivalence(bdata,bout)
integer*2 idata(2048,256)
byte buffer(8192)
integer*2 ierr
integer mmphys,i,j,k,i1,j1,k1,threshold,ncolors,
1      ik,jk,color
logical getmap,header_flag
integer nkept,ulx,uly,imin,imax
real list(7,64)
integer kept(5,64)

common /window/ buffer

if(getmap())then
call prepare_map('3disk1:[gold.usps]process.lo')
else
call exit
end if

call get_int(threshold,'enter binarization threshold')
call get_two_int(imin,imax,'enter blob size thresholds'//
1      '(min and max)')
call get_logical(header_flag,'do images on tape have headers?')

call ini(500)
call selres(1)
do 10 i=0,255
call cmap(i,i,i,i)
continue
call setcol(0)
call movp1(1024,0)
call movp2(1023,1023)
call ffill
call setcol(255)
call movp1(0,0)
call movp2(1023,1023)
call ffill
call sendf

write(*,*) 'reading first file'
call file_from_Tape(bdata,header_flag)

mmphys = 4096
do 1 i=1,256,4
call setmmr(mmphys,ierr)
call i4booke(buffer,bdata(1,i),2048)
mmphys = mmphys+8192
continue

call movp1(0,0)
call movp2(1023,255)
do 20 i=1,256
k = 1
do 201 j=1,1024
bout(j,i) = bdata(k,i)

```

```

      k = k+2
201  continue
20  continue
      call wrbyte(bout,1024,256)

5      write(*,*) 'reading second file'
      call file_from_tape(bdata,header_flag)

      do 2 i=1,256,4
10        call setmmr(mmphys,ierr)
          call i4bpoke(buffer,bdata(1,i),2048)
          mmphys = mmphys+8192
2        continue

      call movp1(0,256)
15      call movp2(1023,511)
      do 21 i=1,256
        k = 1
        do 210 j=1,1023
          bout(j,i) = bdata(k,i)
20          k = k+2
210      continue
21      continue
      call wrbyte(bout,1024,256)

25      write(*,*) 'starting process'
      call strtmm(0,ierr)
      call waitmm(ierr)

      mmphys = 4096
      do 3 i=1,256,4
30        call setmmr(mmphys,ierr)
          call i4bpeek(buffer,bdata(1,i),2048)
          mmphys = mmphys+8192
3        continue
      call closmm(ierr)

35      do 24 i=1,256
        do 241 j=1,2048
          idata(j,i) = zext(bdata(j,i))
241      continue
24      continue

40      call movp1(0,512)
      call movp2(1023,767)
      do 23 i=1,256
        k = 1
45        do 230 j=1,1024
          bout(j,i) = bdata(k,i)
          k = k+2
230      continue
23      continue
      call wrbyte(bout,1024,256)

50      write(*,*) 'blob encoding'
      call blobs(idata,2048,256,threshold,ncolors)
      write(*,*) 'number of blobs found was:',ncolors

55      write(*,*) 'pruning blobs'
      call blob_prune(idata,ncolors,imin,imax,nkept)

```

```

5  write(*,*) 'number of blobs kept:',nkept
   write(*,*) 'analyzing remaining blobs'
   call blob_stats(kept,list,nkept,idata)

   do 5 i=1,nkept-1                                !merge close blobs
     do 50 j=i+1,nkept
10      if(abs(kept(2,i)-kept(4,j)) .lt. 10 .and.
1       abs(kept(1,i)-kept(3,j)) .lt. 25)then      !merge i,j
         kept(1,i) = kept(1,j)
         kept(2,i) = kept(2,j)
         kept(3,j) = kept(3,i)
         kept(4,j) = kept(4,i)
15      list(7,i) = (list(1,i)*list(7,i)+list(1,j)*list(7,j))/
1       (list(1,i)+list(1,j))
         list(7,j) = list(7,i)
         list(1,i) = list(1,i)+list(1,j)
         list(1,j) = list(1,i)
         go to 50
20      else if(abs(kept(1,j)-kept(3,i)) .lt. 25 .and.
1       abs(kept(2,j)-kept(4,i)) .lt. 10)then      !merge i,j
         kept(1,j) = kept(1,i)
         kept(2,j) = kept(2,i)
         kept(3,i) = kept(3,j)
         kept(4,i) = kept(4,j)
25      list(7,i) = (list(1,i)*list(7,i)+list(1,j)*list(7,j))/
1       (list(1,i)+list(1,j))
         list(7,j) = list(7,i)
         list(1,i) = list(1,i)+list(1,j)
         list(1,j) = list(1,i)
         go to 50
30      end if
       continue
     continue

   do 51 i=1,nkept-1                                !test for parallel, not too
     do 52 j=i+1,nkept                                !close or far apart
35      if(abs(list(7,i)-list(7,j)) .gt. 1.0)then      !not parallel
         go to 52
       else if(abs(kept(1,i)-kept(1,j)) .gt. 400 .or.
1       abs(kept(3,i)-kept(3,j)) .gt. 400)then      !too far apart, ignore
         go to 52
       else if(abs(kept(1,i)-kept(1,j)) .lt. 125 .or.
40      abs(kept(3,i)-kept(3,j)) .lt. 125)then      !too close, ignore
         go to 52
       else if(abs(kept(2,i)-kept(2,j)) .gt. 50 .or.
1       abs(kept(4,i)-kept(4,j)) .gt. 50)then      !not aligned
         go to 52
       else
         !just right
         if(kept(5,i) .eq. 0 .and. kept(5,j) .eq. 0)then
45          kept(5,i) = j
          kept(5,j) = i
          !first parallel line
       else
         if(kept(5,i) .eq. 0)then
           k = kept(5,j)
         else
50          k = kept(5,i)
         end if
         i1 = abs(list(2,i)-1024)
         j1 = abs(list(2,j)-1024)
75      end if
     end do
   end do

```

55

```

5      k1 = abs(list(2,k)-1024)
      ik = abs(list(2,i)-list(2,k))
      jk = abs(list(2,j)-list(2,k))
      if(jk .lt. 125)then !attach i to the larger blob
          if(list(1,j) .ge. list(1,k))then
              kept(5,i) = j
              kept(5,j) = i
              kept(5,k) = 0
10          else
              kept(5,i) = k
              kept(5,j) = 0
              kept(5,k) = i
          end if
      else if(ik .lt. 125)then !attach j to the larger blob
15          if(list(1,i) .ge. list(1,k))then
              kept(5,i) = j
              kept(5,j) = i
              kept(5,k) = 0
          else
              kept(5,i) = 0
              kept(5,j) = k
              kept(5,k) = j
20          end if
      else
          !attach 2 most central blobs
          if(i1 .lt. j1 .and. i1 .lt. k1)then !i is central
              if(j1 .lt. k1)then !j is next
25                  kept(5,i) = j
                  kept(5,j) = i
                  kept(5,k) = 0
              else
                  kept(5,i) = k
                  kept(5,j) = 0
                  kept(5,k) = i
30              end if
          else if(j1 .lt. k1 .and. j1 .lt. i1)then !j is central
              if(i1 .lt. k1)then !i is next
35                  kept(5,i) = j
                  kept(5,j) = i
                  kept(5,k) = 0
              else
                  kept(5,i) = 0
                  kept(5,j) = k
                  kept(5,k) = j
              end if
40          else if(k1 .lt. i1 .and. k1 .lt. j1)then !k is central
              if(i1 .lt. j1)then !i is next
                  kept(5,i) = k
                  kept(5,j) = 0
                  kept(5,k) = i
              else
45                  kept(5,i) = 0
                  kept(5,j) = k
                  kept(5,k) = j
              end if
          end if
      end if
50  end if
      end if
      continue
      continue
55

```

```

color = C
do 6 i=1,nkept-1
5   if(kept(5,i) .eq. 0) go to 6   !outline the label
   j = kept(5,i)                 !parallel to nothing
   call polys
   ulx = kept(1,i)/2
   uly = kept(2,i)+767
   call polyv(ulx,uly)
10  ulx = kept(1,j)/2
   uly = kept(2,j)+767
   call polyv(ulx,uly)
   ulx = kept(3,j)/2
   uly = kept(4,j)+767
   call polyv(ulx,uly)
15  ulx = kept(3,i)/2
   uly = kept(4,i)+767
   call polyv(ulx,uly)
   call polyc
   call setcol(color)
   call polyf
   color = color+1
20  continue

close(unit=2)

call frand(1024,256,0,256,0,768)

25  call fini
   call exit

end

subroutine blob_prune(idata,ncol,min,max,nkept)
30  implicit none

integer ncol,min,max,nkept
integer*2 idata(2048,256)

integer lut(0:32767),i,j,k

35  step 1: histogram the blob sizes

do i=0,ncol
   lut(i) = 0
end do

40  do i=1,256
   do j=1,2048
   k = idata(j,i)
   lut(k) = lut(k)+1
   end do
end do

45  step 2: if lut(j) is not within min-max, set to 0, else reassign color
nkept = 0
lut(0) = 0
do i=1,ncol
   if(lut(i) .lt. min .or. lut(i) .gt. max) then
50     lut(i) = 0

```

55

```

    else
        nkept = nkept+1
        lut(i) = nkept
    end if
end do

step 3: remap idata through lut

do i=1,256
do j=1,2048
    idata(j,i) = lut(idata(j,i))
end do
end do

return
end

subroutine file_from_tape(buffer,header_flag)
    INCLUDE '($IODEF)'
    INCLUDE '($SSDEF)'

    BYTE buffer(2048,256)
    INTEGER*2 HEADER(256)
    logical header_flag

    PARAMETER BUFFER_LENGTH = 16384, INPUT_FLAG = 1
    INTEGER*4 INPUT_POINTER

    INTEGER*4 SYSSASSIGN,SYSSQIO

    INTEGER*4 INPUT_DIR_STATUS
    INTEGER*2 INPUT, INPUT_STATUS(4)

    Assign channels to the input tape drive

    INPUT_DIR_STATUS = SYSSASSIGN ('MSAJ:', INPUT,,)

    IF (INPUT_DIR_STATUS .NE. SSS_NORMAL) THEN
        TYPE 20,INPUT_DIR_STATUS
        FORMAT (' ERRCR! Unable to assign channel to input tape drive',
            1      ' Error code =',Z9.4)
        GO TO 990
    END IF

    Read the first record from the input tape drive (image header)

    if(header_flag)then
        INPUT_DIR_STATUS = SYSSQIO (%val(INPUT_FLAG),
            1      %val(INPUT),
            2      %val(IOS_READBLK),
            3      INPUT_STATUS,,,
            4      HEADER,
            5      %val(BUFFER_LENGTH),
            6      ,,,)
        CALL SYSSWAITFR (%val(INPUT_FLAG))
    end if

    do 1 input_pointer=1,256

```



```

INPUT_DIR_STATUS = SYS$QIO (%val(INPUT_FLAG)
1                               %val(INPUT),
2                               %val(IOC_READL3LK),
3                               INPUT_STATUS,,,
5                               BUFFER(1,input_pointer),
6                               %val(BUFFER_LENGTH),
                               ,,,)
CALL SYS$WAITFR (%val(INPUT_FLAG))

10      continue

      READ THE EOF

INPUT_DIR_STATUS = SYS$QIO (%val(INPUT_FLAG),
15      1                               %val(INPUT),
      2                               %val(IOC_READL3LK),
      3                               INPUT_STATUS,,,
      4                               HEADER,
      5                               %val(BUFFER_LENGTH),
20      6                               ,,,)
CALL SYS$WAITFR (%val(INPUT_FLAG))

CALL SYS$DASSGN(INPUT)

25      90      return
      END

```

30

35

40

45

50

55

PROGRAM PROC

```

5  INTEGER CATA1(1024,256),CATA2(1024,256)
   REAL CDATA1(4096,32),CDATA2(4096,32)
   REAL DUM1R(1),DUM1I(1),DUM2R(1),DUM2I(1)
   REAL DUM1(1,1),DUMP1(1,1),DUM2(1,1),DUMP2(1,1)
   REAL CSPEC1(1,1),CSPEC2(1,1),CEXP(1),DUMWK(1)
   INTEGER IDUM1(1),IDUM2(1)
   REAL EXP(4096),A1(32),A2(32),FWORK(4096)
10  INTEGER I,J
   REAL DUMA1(1),DUMA2(1)

   COMMON /IO1/ DATA1
   COMMON /IO2/ DATA2
   COMMON /LOCAL1/ CDATA1
15  COMMON /LOCAL2/ CDATA2
   COMMON /WORK/ EXP,FWORK,A1,A2,I,J

   CALL IDENT(DUM1R,CDATA1(1,1),2,65536.0)
   CALL IDENT(DUM1I,CDATA1(1,1),1,2,65536.0)
20  CALL IDENT(DUM2R,CDATA2(1,1),2,65536.0)
   CALL IDENT(DUM2I,CDATA2(1,1),1,2,65536.0)
   CALL IDENT(CSPEC1,CDATA1(1,1),4096,32,2,2048)
   CALL IDENT(CSPEC2,CDATA2(1,1),4096,32,2,2048)
   CALL IDENT(CEXP,EXP(1),2,2048)
   CALL IDENT(DUM1,CDATA1(1,1),4096,32,1,34)
25  CALL IDENT(DUMP1,CDATA1(1,1),4064,4096,32,1,32)
   CALL IDENT(DUM2,CDATA2(1,1),4096,32,1,34)
   CALL IDENT(DUMP2,CDATA2(1,1),4064,4096,32,1,32)
   CALL IDENT(DUMWK,FWORK(1),1,4096)
   CALL IDENT(DUMA1,A1(1),1,32)
30  CALL IDENT(DUMA2,A2(1),1,32)

   CALL GCXT4(CEXP)

   DO 1 I=1,256,32

35  CALL IDENT(IDUM1,DATA1(1,I),1,32768.0)
   CALL IDENT(IDUM2,DATA2(1,I),1,32768.0)

   CALL VCLR(DUM1I)
   CALL VCLR(DUM2I)

40  CALL VFLB(DUM1R,1.0,IDUM1,1.0)
   CALL VFLB(DUM2R,1.0,IDUM2,1.0)

   CALL VLN(DUM1R,1.0,DUM1R)
45  CALL VLN(DUM2R,1.0,DUM2R)

   CALL FCFCL(CSPEC1,CSPEC1,DUMWK,CEXP)
   CALL FCFCL(CSPEC2,CSPEC2,DUMWK,CEXP)

   CALL MSMA1(DUM1,C.0,DUM1,C.0)
50  CALL MSMA1(DUMP1,C.0,DUMP1,C.0)
   CALL MSMA1(DUM2,C.0,DUM2,C.0)
   CALL MSMA1(DUMP2,C.0,DUMP2,C.0)

   CALL FCICL(CSPEC1,CSPEC1,DUMWK,CEXP)
55  CALL FCICL(CSPEC2,CSPEC2,DUMWK,CEXP)

```

CALL VSB(DUM1R,DUM2R)

CALL VA(DUM1R)

5 CALL MCMAX(DUMA1,DUMA2,CSPEC1)

CALL VRCP(DUMA1,-255.0,DUMA1,0.001)

DO 2 J=1,32

10 CALL VSMA1(CDATA1(1,J),A1(J),CDATA1(1,J),255.0,2048,2,2)
CONTINUE

CALL VFXB(IDUM1,1.0,DUM1R,0.0,255.0)

CONTINUE

15

PAUSE

END

20

25

30

35

40

45

50

55

```

5      subroutine BLOBS(a,NX,NY,ithr,icols)
      *****
      blobsx.for      modified by J. MacAuslan 5/25/84
      from 'blobs3'
      mod. 1/19/85 (j.m.) to use 'BKGD2', and init. only 1st "few" elements
      of 'lut'.

      Identifies all connected regions in a, and colour codes
10     them. regions having value > ithr in a, are reset
      to 0, regions < ithr are tested to
      assign colours 1,2,...

      arguments
          a          input array integer*2
          NX,NY      no. "rows", "cols" of a
15         ithr      threshold for black ridges
          icols      number of separate regions or colours

      IMPORTANT: 'lut("i")' is always .LE. "i" (for all "i" in 0..'FULL')
      -- certain parts of this routine make use of this restriction.
      Also, 'lut(lut("i"))' = 'lut("i")' ("i" in 0..'FULL') -- i.e., each
      output pixel is to be mapped in a SINGLE pass thru 'lut' into the color
20     it is to be given (as well as is known as each pixel is processed).

      *****
      implicit none
      integer FULL,BORDER,BKGD
      INTEGER*2 BKGD2          ! Just to avoid some needless type-conversions
      parameter (FULL=32767, BORDER = 0, BKGD = 0, BKGD2 = BKGD)
25
      Arr_Map_Int_Tbl_Int2(I*2('N'): Out;I*2('N');N=LEN;INT(0:'K');K=LEN)
      integer NX,NY,lut(0:FULL),lut2(0:FULL)
      integer*2 a(NX,NY)

      integer i,j,l
      integer c,d
30     integer icols,ithr,ncols

      procedure

      initialize counters. 'ncols' is the current region number to be filled
      in (i.e., the number of colors used so far).
35
      initialize lut (max. no. of features is given by checkerboard pattern,
      for which no. of features is '1+NX*NY/2'; but limit to 'FULL' = length
      of 'lut' array, of course):
      do i=0,Min(FULL,1+NX*NY/2)
          lut(i)=i
      end do
40     * >> 'lut("i")' .LE. "i" (all "i" in 0..'FULL') <<.
      ncols=0
      IF(BKGD.LT.FULL/2) ncols = BKGD

      fill in neighborhood ('b') with colors, a different color for each
      region. Border pixels, and those that are >ithr in the input ('a')
      array, are given the value 'BKGD2', and do not contribute to
45     the count of regions.

      process first column of a, separate process for first element

```

50

55

```

ncols = C
5  if(a(1,1) .gt. ithr) then
    a(1,1) = BKGD2
  else
    ncols = ncols+1
    a(1,1) = ncols
  end if
do i=2,nx          !do rest of column
10  if(a(i,1) .gt. ithr) then          !not in a component
    a(i,1) = BKGD2
  else if(a(i-1,1) .ne. BKGD2) then    !fill with same color
    a(i,1) = a(i-1,1)
  else                                  !assign a new color
    ncols = ncols+1
    a(i,1) = ncols
15  end if
end do

do 1000 j=2,NY          !do rest of columns

test first element in column versus its left hand neighbor

20  if(a(1,j) .gt. ithr) then          !not in a component
    a(1,j) = BKGD2
  else if(a(1,j-1) .ne. BKGD2) then    !fill with same color
    a(1,j) = a(1,j-1)
  else if(a(2,j-1) .ne. BKGD2) then    !fill with same color
    a(1,j) = a(2,j-1)
25  else                                  !assign a new color
    IF(ncols.EQ.FULL) THEN
      CALL SzLUT(lut,FULL,a,(j-1)*NX,ncols,lut2)
    END IF
    ncols = ncols+1
    a(1,j)=ncols
  end if
30  do 1001 i=2,NX-1          !now do rest of column

    if(a(i,j).gt.ithr) then          !set threshold for ridges
      a(i,j)=BKGD2                  !part of the edge
      go to 1001

35  else if (a(i-1,j).ne.BKGD2) then    !fill with same color as pixel
                                          !above
      a(i,j)=a(i-1,j)
      if( a(i,j-1).ne.BKGD2) then      !modify colors if necessary
                                          !to make each region have
                                          !only one color
40          if(a(i,j).ne.a(i,j-1)) then
              c=min(lut(a(i,j)),lut(a(i,j-1)))
              d=max(lut(a(i,j)),lut(a(i,j-1)))
              lut(d)=c                ! 'lut(d)' is reduced here.
              do l=c,ncols
                  if(lut(l).eq.d) lut(l)=c
              end do
          end if
45          end if
          if( a(i-1,j-1).ne.BKGD2) then
              if(a(i,j).ne.a(i-1,j-1)) then
50
55

```

```

c=min(lut(a(i,j)),lut(a(i-1,j-1)))
d=max(lut(a(i,j)),lut(a(i-1,j-1)))
lut(d)=c      ! 'lut(d)' is reduced here.
do l=c,ncols
5         if(lut(l).eq.d) lut(l)=c
        end do
    end if
end if
if( a(i+1,j-1).ne.BKGD2)then
10     if(a(i,j).ne.a(i+1,j-1)) then
        c=min(lut(a(i,j)),lut(a(i+1,j-1)))
        d=max(lut(a(i,j)),lut(a(i+1,j-1)))
        lut(d)=c      ! 'lut(d)' is reduced here.
        do l=c,ncols
15             if(lut(l).eq.d) lut(l)=c
            end do
        end if
    end if
    go to 1001

else if (a(i,j-1).ne.BKGD2) then          !fill with same color as
20     a(i,j)=a(i,j-1)                    !previous pixel to left
    if( a(i+1,j-1).ne.BKGD2)then
        if(a(i,j).ne.a(i+1,j-1)) then
            c=min(lut(a(i,j)),lut(a(i+1,j-1)))
            d=max(lut(a(i,j)),lut(a(i+1,j-1)))
25             lut(d)=c      ! 'lut(d)' is reduced here.
            do l=c,ncols
                    if(lut(l).eq.d) lut(l)=c
                end do
            end if
        end if
30     if( a(i-1,j-1).ne.BKGD2)then
        if(a(i,j).ne.a(i-1,j-1)) then
            c=min(lut(a(i,j)),lut(a(i-1,j-1)))
            d=max(lut(a(i,j)),lut(a(i-1,j-1)))
            lut(d)=c      ! 'lut(d)' is reduced here.
35             do l=c,ncols
                    if(lut(l).eq.d) lut(l)=c
                end do
            end if
        end if
        go to 1001

40     else if (a(i-1,j-1).ne.BKGD2) then          !fill with same color as
            a(i,j)=a(i-1,j-1)                    !previous pixel to left
            if( a(i+1,j-1).ne.BKGD2)then
                if(a(i,j).ne.a(i+1,j-1)) then
45                     c=min(lut(a(i,j)),lut(a(i+1,j-1)))
                     d=max(lut(a(i,j)),lut(a(i+1,j-1)))
                     lut(d)=c      ! 'lut(d)' is reduced here.
                     do l=c,ncols
                             if(lut(l).eq.d) lut(l)=c
                         end do
                    end if
50             end if
            end if
            go to 1001

```

55

```

else if(a(i+1,j-1) .ne. BKGD2) then
5      a(i,j) = a(i+1,j-1)
      go to 1001
else
      !apparently a new region, so fill with new color
      IF(ncols.EQ.FULL) THEN
          CALL SetLUT(lut,FULL,a,(j-1)*NX+i-1,ncols,lut2)
          END IF
10      ncols = ncols+1
      z(i,j)=ncols

      end if

1001  continue
:
:  now do last element in column
15  :
      if(a(NX,j) .gt. ithr) then
          a(NX,j) = BKGD2
          go to 1000
      else if(a(NX-1,j) .ne. BKGD2) then          !pixel above
          a(NX,j) = a(NX-1,j)
          if(a(NX,j-1) .ne. BKGD2) then
20              if(a(NX,j) .ne. a(NX,j-1)) then
                  c=min(lut(a(NX,j)),lut(a(NX,j-1)))
                  d=max(lut(a(NX,j)),lut(a(NX,j-1)))
                  lut(d)=c          ! "lut(d)" is reduced here.
                  do l=c,ncols
25                      if(lut(l).eq.d) lut(l)=c
                  end do
              end if
          end if
          if(a(NX-1,j-1) .ne. BKGD2) then
              if(a(NX,j) .ne. a(NX-1,j-1)) then
                  c=min(lut(a(NX,j)),lut(a(NX-1,j-1)))
                  d=max(lut(a(NX,j)),lut(a(NX-1,j-1)))
30                  lut(d)=c          ! "lut(d)" is reduced here.
                  do l=c,ncols
                      if(lut(l).eq.d) lut(l)=c
                  end do
              end if
          end if
          go to 1000
35      else if(a(NX,j-1) .ne. BKGD2) then          !pixel to left
          a(NX,j) = a(NX,j-1)
          if(a(NX-1,j-1) .ne. BKGD2) then
              if(a(NX,j) .ne. a(NX-1,j-1)) then
                  c=min(lut(a(NX,j)),lut(a(NX-1,j-1)))
                  d=max(lut(a(NX,j)),lut(a(NX-1,j-1)))
40                  lut(d)=c          ! "lut(d)" is reduced here.
                  do l=c,ncols
                      if(lut(l).eq.d) lut(l)=c
                  end do
              end if
          end if
          go to 1000
45      else if(a(NX-1,j-1) .ne. BKGD2) then          !pixel to left and above
          a(NX,j) = a(NX-1,j-1)
          go to 1000
      else
50
55
          !new color

```



```

5      IF(ncols.EQ.FULL) THEN
          CALL SqzLUT(lut,FULL,a,NX+j-1,ncols,lut2)
        END IF
        ncols = ncols+1
        a(NX,j)=ncols
      end if
10      GO      continue

      * Fix up 'lut' (if nec.), map through 'lut':
      lut(BKGD) = BORDER
      CALL SqzLUT(lut,FULL,a,NX*NY,ncols,lut2)
      icols = ncols
      return
15      end

-----
      subroutine lutfix(LUT,NLUT1,lut2,NLUT2,ncells2)
      integer LUT(0:NLUT1)
      integer lut2(0:NLUT2)

20      * On input, 'LUT("i")' .LE. "i", for all "i" in 0..NLUT1.
      ncells2 = -1
      do i=0,NLUT1

          IF(LUT(i).EQ.i) THEN
              ncells2 = ncells2 + 1
              lut2(i) = ncells2
              if(ncells2.EQ.NLUT2) GO TO 1900
25          END IF

          ! Guaranteed TRUE for 'i' = 0.
          ! >> 'i'=0 => 'ncells2' = 0 <<
          ! >> ... so 'lut2(0)' = 0 <<

          * >> 'ncells2' in 0 .. 'i' <<.
        end do
      RETURN
30      write(*,*) char(9),'No. cells .GE. ',NLUT2
      RETURN
      END

-----
      SUBROUTINE SqzLUT(lut,LUTSIZE,b,BLEN,ncols,lut2)
      IMPLICIT NONE
      DECLARE:
      In:
          INTEGER LUTSIZE,BLEN
          ! Type LEN
      In/Out:
          INTEGER lut(0:LUTSIZE),lut2(0:LUTSIZE)
          ! Type "COLOR" is type 0..LUTSIZE"
          INTEGER*2 b(*)
          ! Type "COLOR"
          INTEGER ncols
          ! Type NUM
      Local:
          INTEGER ncols0
          ! Type NUM
          INTEGER i
          ! Type INDEX
      Routines:
40      Arr_Map_Tbl_Int(INT('N'): Out(0..'K')('N'):N=LEN;INT(0:'K'):K=LEN)
      Arr_Map_Int_Tbl_Int2(I+2('N'): Out(0..'K'):I+2('N'):N=LEN;INT(0:'K'):K=LEN)
      LUTfix(NUM(0:'L'):L=LEN;NUM(0:'N'): Out:N=LEN;NUM)

      *****
      "SQUEEZE" LOOK-UP TABLE, SO THAT REDUNDANT COLORS ARE DE-ASSIGNED, AND USED
      COLORS ARE CONSECUTIVE.
      *****

```

```

5  C Note that only first 'ncols' colors are processed.
  C
  C VARIABLES:
  C   External:
  C       Requirements (on entry):
  C           'lut("i")' in 0..'i' (=> all values in C..'LUTSIZE')
  C           'b' elements in C..'LUTSIZE'
  C           'ncols' in 0..'LUTSIZE'
10  C       Guarantees (on return):
  C           'ncols' .LE. initial (on-entry) value
  C           'b' elements in 0..'ncols', and, for all "i" in 0..'ncols',
  C               there exists an element of 'b' with value "i"
  C           'lut("i")' = "i" ("i" in C..'LUTSIZE')
  C
  C       LUTSIZE = size of look-up tables
  C       lut      = init. look-up table, mapping 'b' to connect components properly
15  C       lut2     = temp. look-up table to adjust 'lut' before mapping 'b'
  C       b        = array of "colors" (to be mapped to assign connected components
  C                   the same color)
  C       ncols    = no. of "colors" used in 'b' array (i.e., values 0..'ncols')
  C
  C   Local:
  C       ncols0    = initial value of 'ncols'
20  C       i        = loop ('lut') index
  C
  C HISTORY:
  C   author: Joel MacAuslan
  C
  C       ncols0 = ncols
  C       * >> 'ncols0' in 0..'LUTSIZE' <<.
25  C       * Count no. of components ("colors"):
  C       call lutfix(lut,ncols0,lut2,LUTSIZE,ncols)
  C       * >> 'ncols' in 0..'ncols0' <<.
  C       * Adjust look-up table:
  C       call arr_map_tbl_int(lut,lut,ncols0+1,lut2,LUTSIZE)
  C       * >> For "i" in C..'ncols', 'lut("i")' = "i" <<.
  C       * Adjust 'b' array correspondingly:
30  C       call arr_map_int_tbl_int2(b,b,PLEN,lut,LUTSIZE)
  C
  C       DO 5000, i = 0,LUTSIZE
5000  lut(i) = i
  C
  C       RETURN
  C       END

```

35

40 Claims

1. Apparatus for generating signals which are representative of edges of an address element which is located adjacent to a substantially horizontal surface of a mailpiece, the address element including a first substantially horizontal surface as well as first and second substantially vertical side surfaces which are located between the first horizontal surface and the second horizontal surface so as to form the edges, the apparatus comprising:

a. illumination means including

1) first light means for generating a first illuminative output directed toward the address element in a first direction and at an acute angle to the horizontal surfaces of the address element and the mailpiece, and
 2) second light means for generating a second illuminative output directed toward the address element in a second direction and at an acute angle to the horizontal surfaces of the address element and the mailpiece, the first light means and the second light means being positioned so that the address element is located therebetween;

b. detection means including

1) first means for i) detecting light reflected from the address element generated by the first light means in a manner that light reflected from the horizontal surfaces generates a first signal having a first level, light reflected from the first side generates a second signal having a second level which is greater than the first level, and light reflected from the second side generates a third signal having a third level which is less than

the first level, and ii) for generating a first output of the first, second and third signals, and
 2) means for i) detecting light reflected from the address element generated by the second light means in a manner that light reflected from the horizontal surfaces generates a fourth signal having a fourth level, light reflected from the second side generates a fifth signal having a fifth level which is greater than the fourth level, and light reflected from the first side generates a sixth signal having a sixth level which is less than the fourth level, and ii) for generating a second output of the fourth, fifth and sixth signals; and

c. signal difference means including means for generating a difference between the levels of the second output and the first output in a manner that i) a difference between the first signal and the fourth signal generates a first difference signal which has a level which is lower than that of the first signal and the fourth signal, ii) a difference between the third signal and the fifth signal generates a second difference signal which has a level that is greater than the first difference signal and which is representative of the location of the second edge, and iii) a difference between the second signal and the sixth signal generates a third difference signal which has a level that is greater than the first difference signal and which is representative of the location of the first edge.

2. The apparatus as set forth in claim 1 wherein the signal difference means includes means for generating a difference between the second output and the first output in a manner that i) a level difference between the first difference signal and the second difference signal is greater than a level difference between the fifth signal and the fourth signal, and ii) a level difference between the first difference signal and the third difference level is greater than a level difference between the second signal and the first signal.

3. The apparatus as set forth in claim 2 wherein:

a. the first level and the fourth level are substantially equal; and

b. the signal difference means includes means for generating the difference between the first level and the fourth level in a manner that the first difference signal has a level of substantially zero.

4. The apparatus as set forth in claim 2 wherein:

a. the address is formed by the first horizontal surface and the first and second side surfaces which extend upward from the mailpiece horizontal surface;

b. the illumination means includes means for operating the first light means and the second light means in a manner that the first illuminative output and the second illuminative output are not present at the same time; and

c. the first light means and the second light means are positioned i) so that the first side surface faces the first light means in a manner that the first illuminative output illuminates the horizontal surfaces and the first side to generate the first and second signals, but the first illuminative output does not illuminate the second side in order to generate the third signal, and ii) so that the second side faces the second light means in a manner that the second illuminative output illuminates the horizontal surfaces and the second side to generate the fourth and fifth signal, but the second illuminative output does not illuminate the first side in order to generate the sixth signal.

5. The apparatus as set forth in claim 3 wherein:

a. the address element is formed by the first horizontal surface and the first and second side surfaces which extend down from the mailpiece horizontal surface;

b. the illumination means includes means for operating the first light means and the second light means in a manner that the first illuminative output and the second illuminative output are not present at the same time; and

c. the first light means and the second light means are positioned i) so that the second side faces the first light means in a manner that the first illuminative output illuminates the horizontal surfaces and the second side to generate the first and second signals, but the first illuminative output does not illuminate the first side in order to generate the third signal, and ii) so that the first side faces the second light means in a manner that the second illuminative output illuminates the horizontal surfaces and the first side to generate the fourth and fifth signals, but the second illuminative output does not illuminate the second side in order to generate the sixth signal.

6. A method of generating a signal which represents an edge of an address element, the method comprising the steps of:

a. providing an address element which is located adjacent to a horizontal surface of a mailpiece and which has a horizontal surface as well as a vertical surface located between the mailpiece horizontal surface and the address element horizontal surface in a manner to form the edge;

b. directing an illuminative output toward the mailpiece and address element at an acute angle to the horizontal surfaces;

5 c. detecting light reflected from the address element and mailpiece in a manner that light reflected from the mailpiece and address element horizontal surfaces generates first and second luminance signals of substantially equal levels, and light reflected from the vertical surface generates a third luminance signal having a level which is different than the levels of the first and second signals; and

10 d. generating i) first and second output signals of substantially equal levels in response to the first and second luminance signals in a manner that the first and second output signals are associated with the locations of the mailpiece and address element horizontal surfaces, and ii) a third output signal, having a level which is different than the levels of the first and second output signals, in response to the third luminance signal and which is associated with the location of the vertical surface between the mailpiece and address element horizontal surfaces.


15 7. The method as set forth in claim 6 wherein:



a. the acute angle is less than 45° ; and



b. the third luminance signal has a level that is greater than the levels of the first and second signals.

20 8. The method as set forth in claim 6 wherein the edge is formed by an intersection of the address element horizontal surface and the vertical surface which is characterized in that it upstands from the mailpiece horizontal surface.

9. The method as set forth in claim 6 wherein the edge is formed by an intersection of the mailpiece horizontal surface and the vertical surface which is characterized in that it depends downward from the mailpiece horizontal surface to the address element horizontal surface.

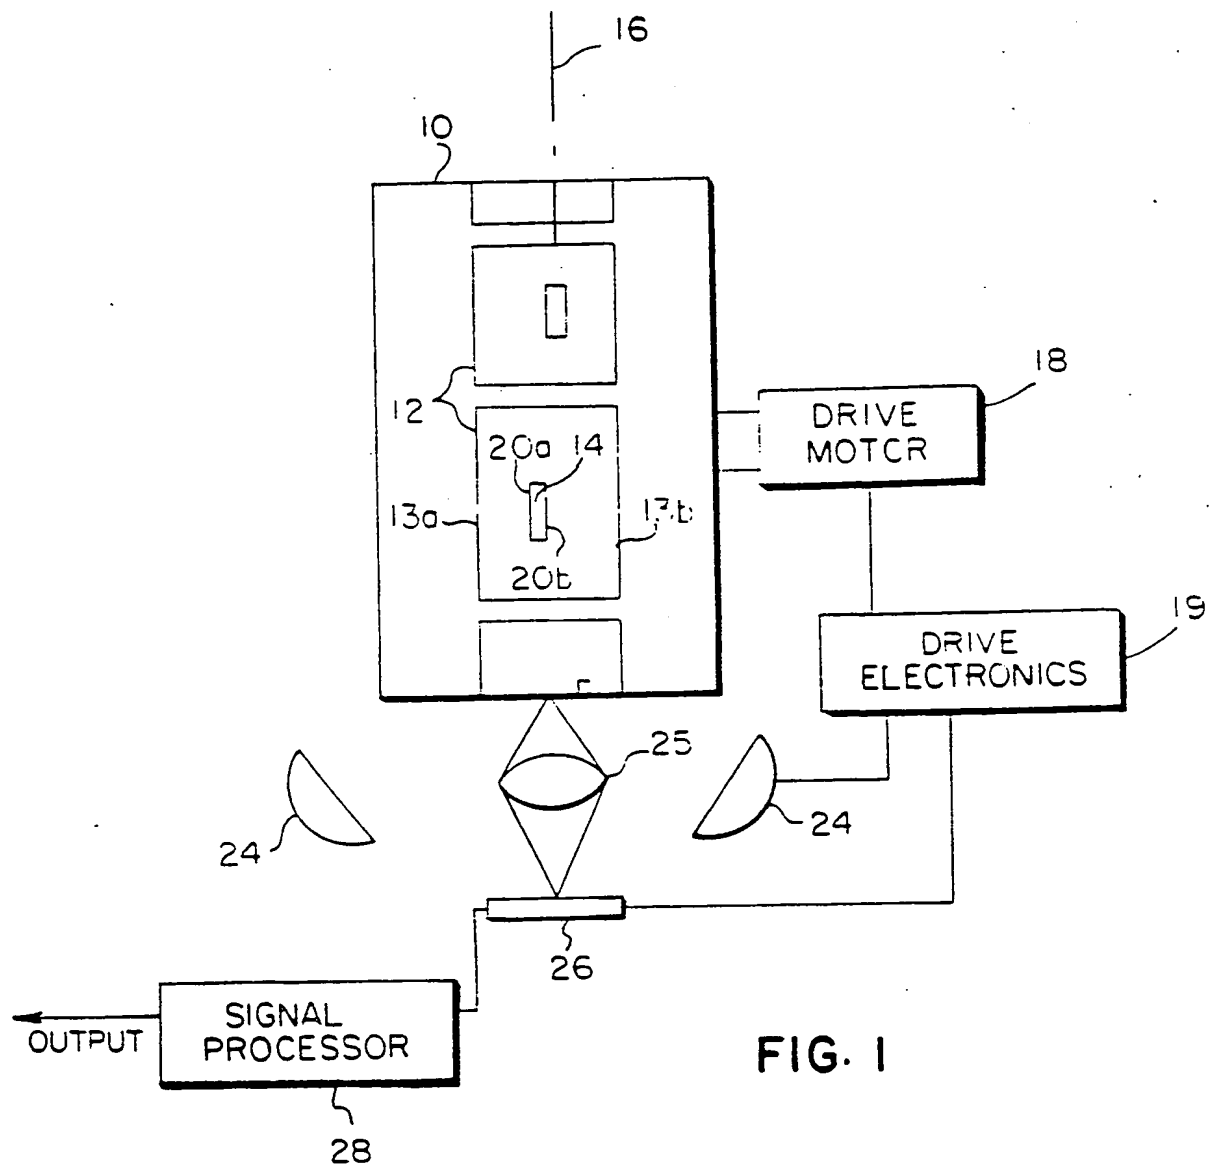

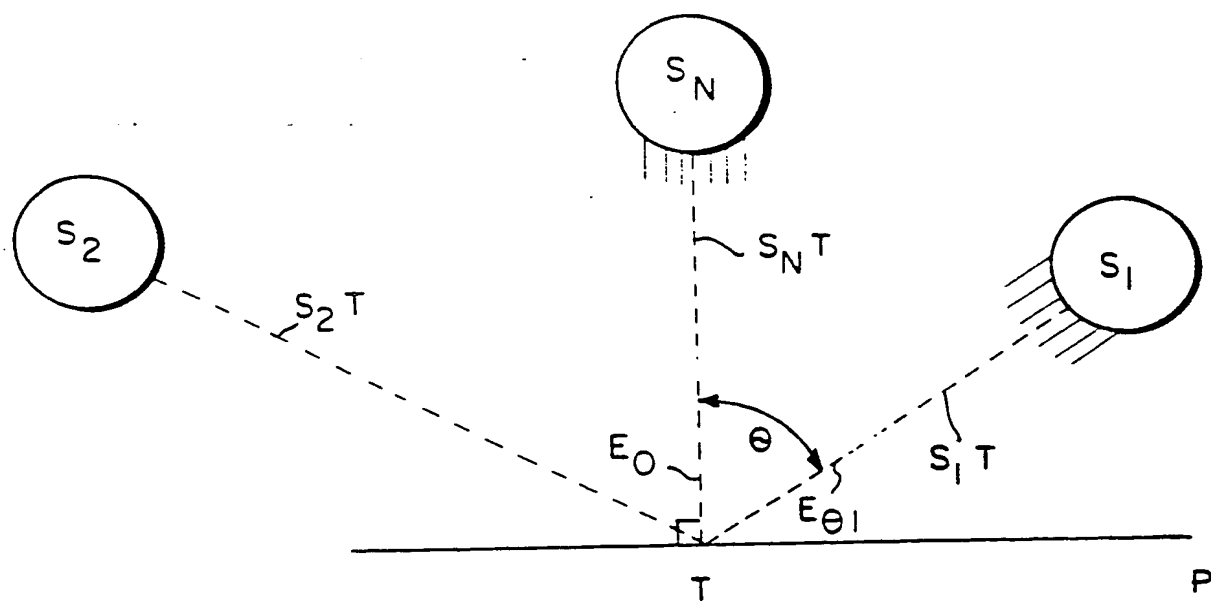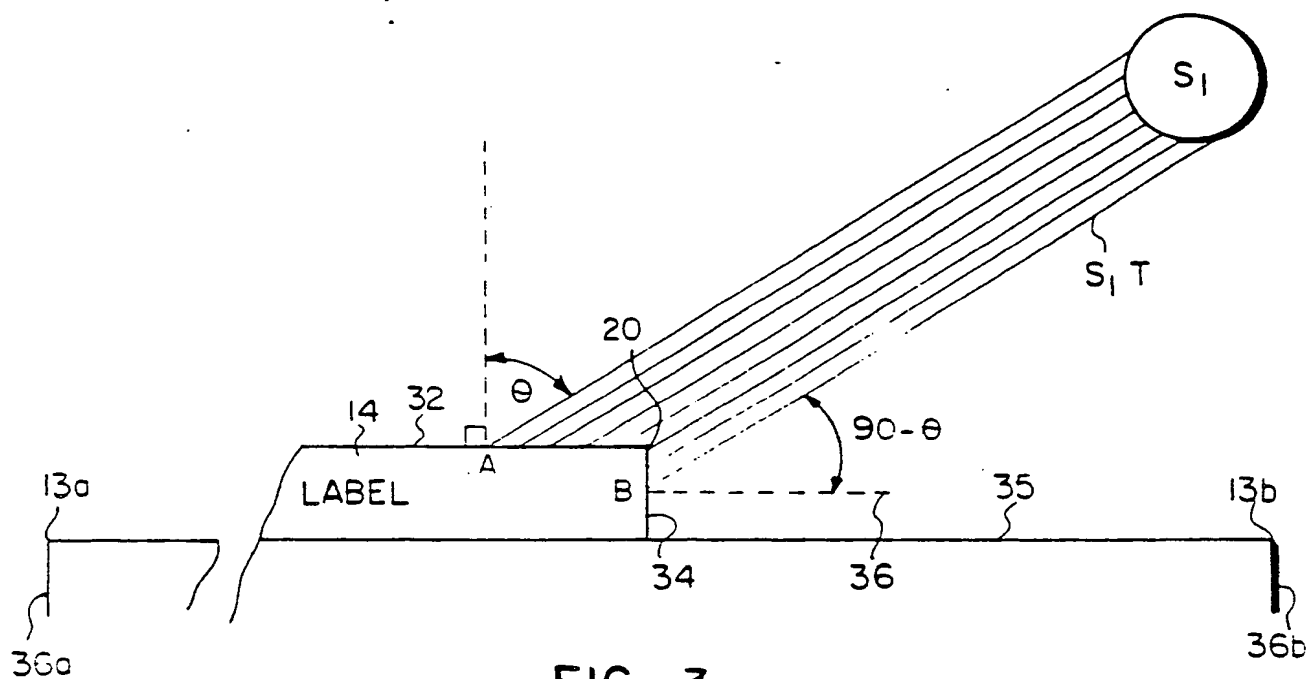

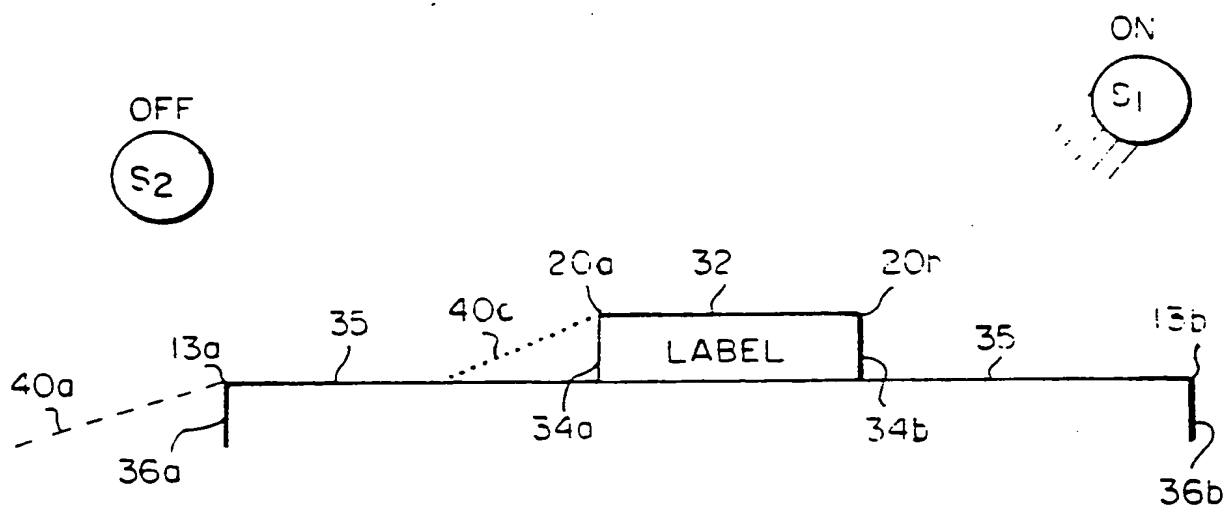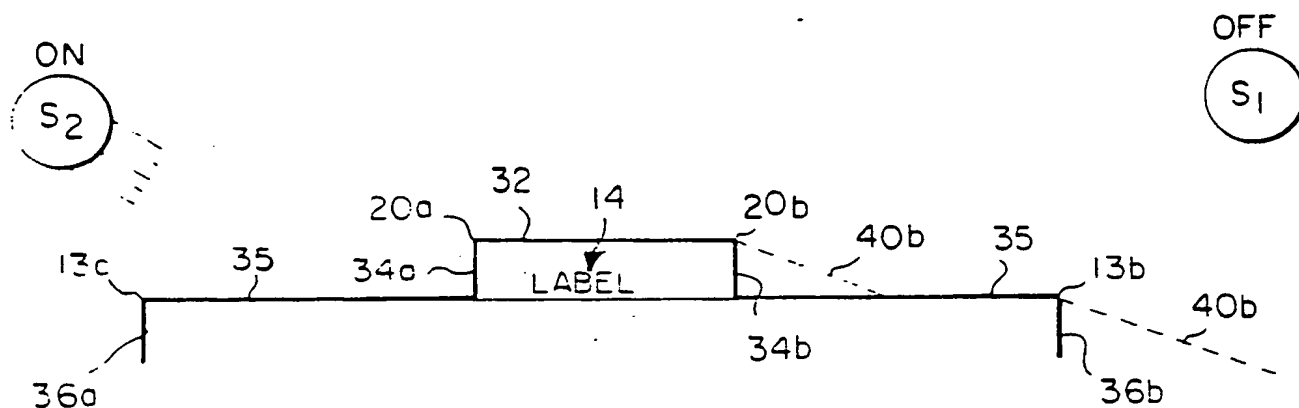

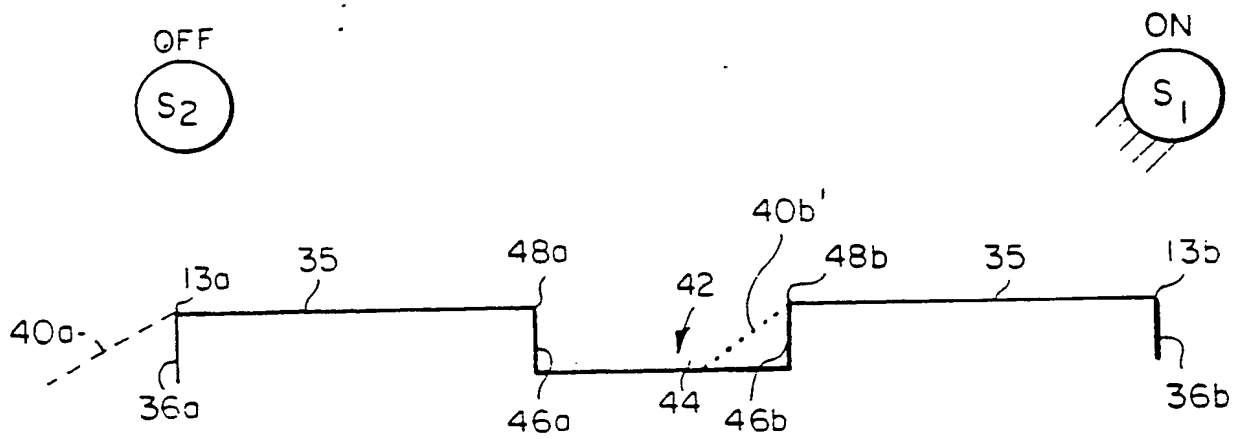


FIG. 5A

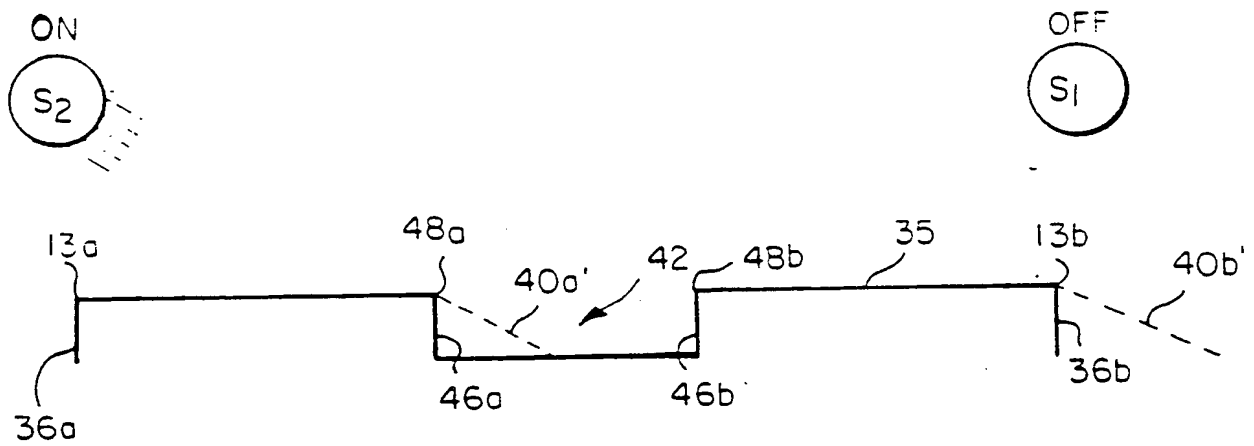


FIG. 5B

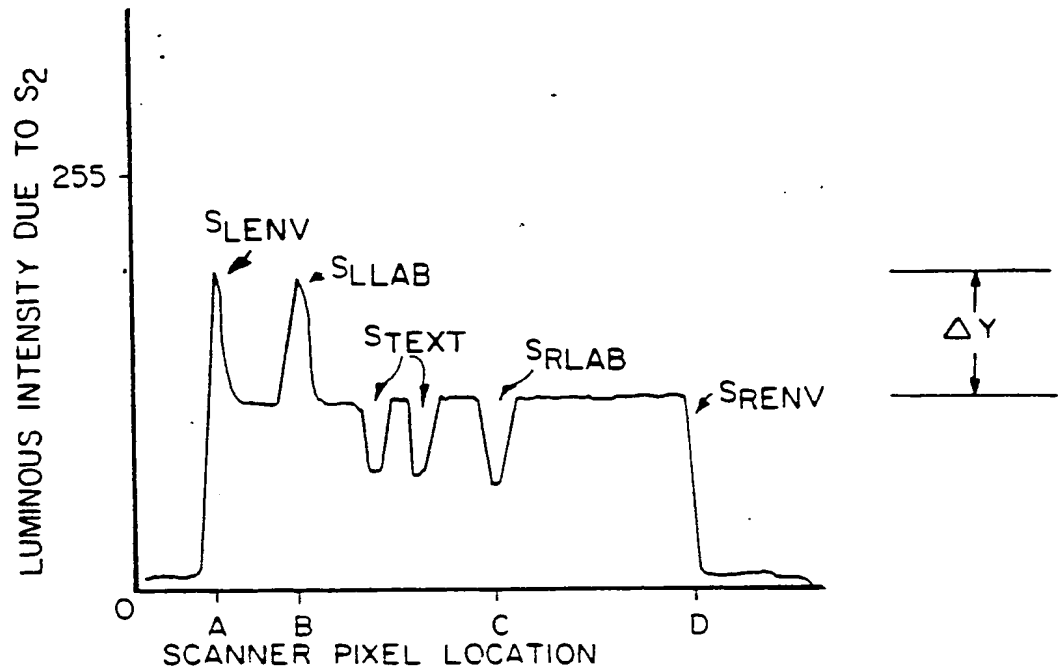


FIG. 6A

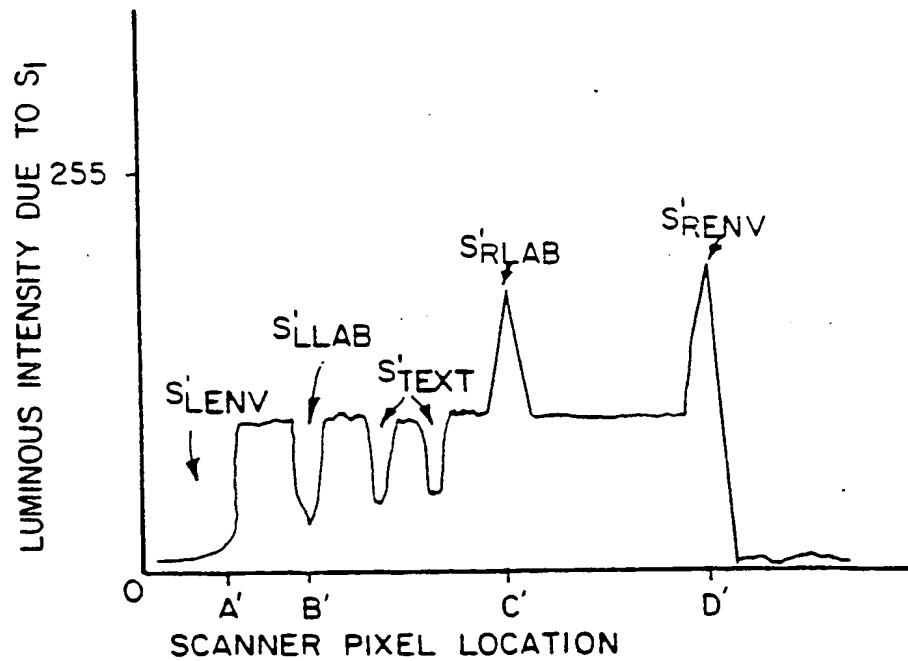


FIG. 6B

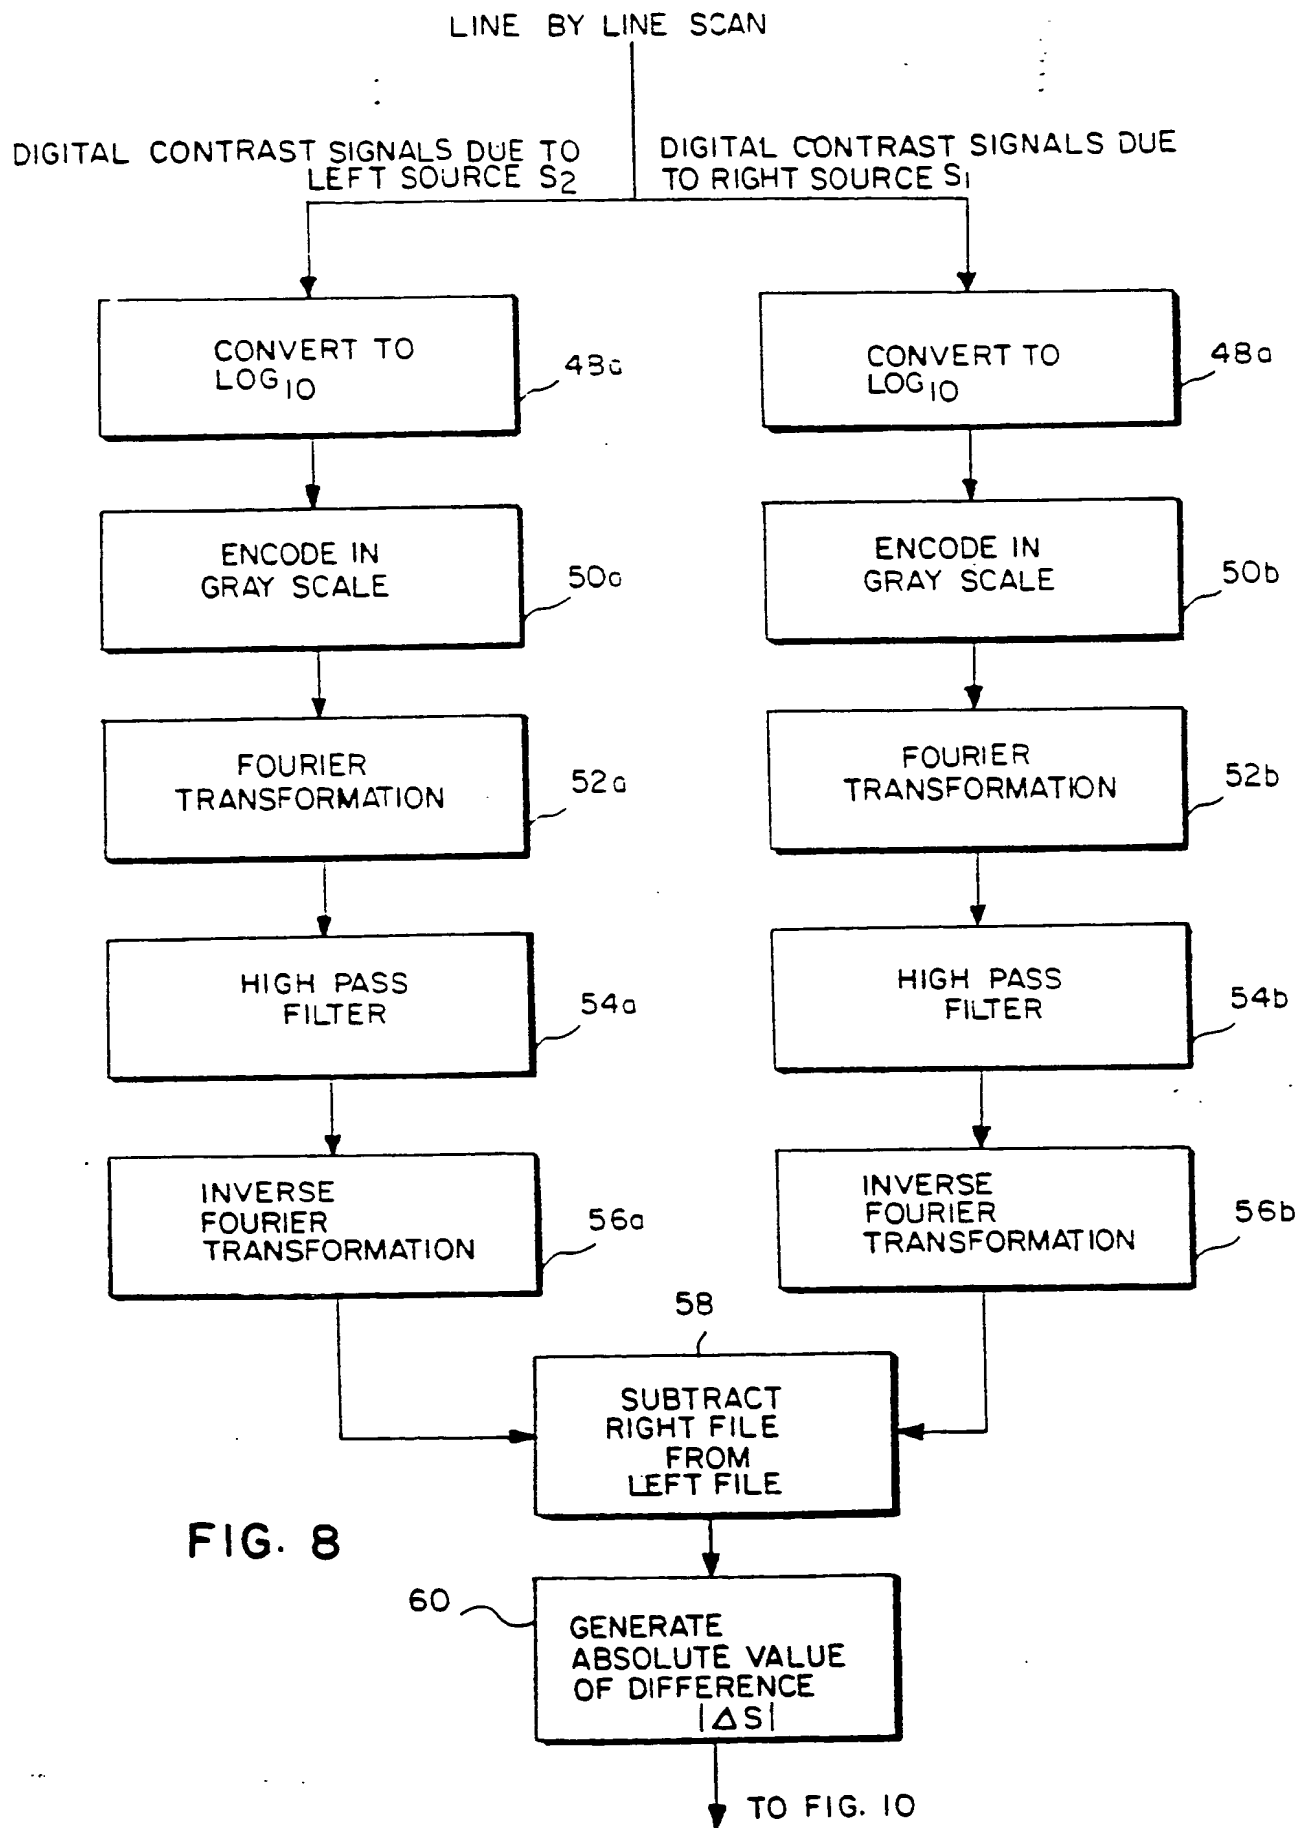


FIG. 8

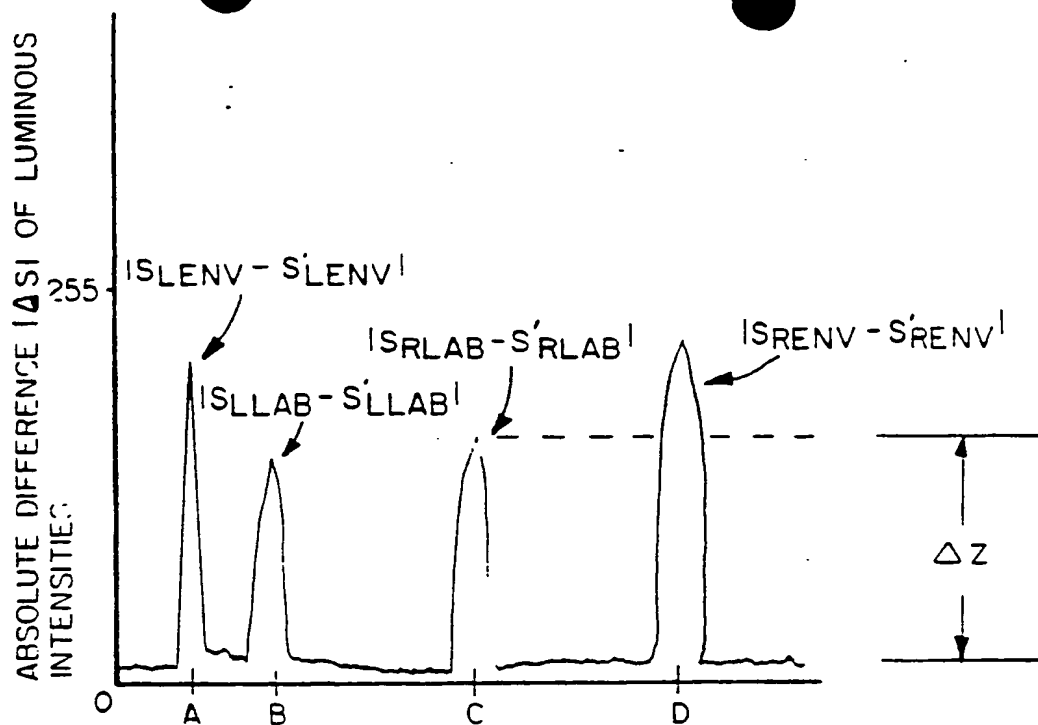


FIG. 7


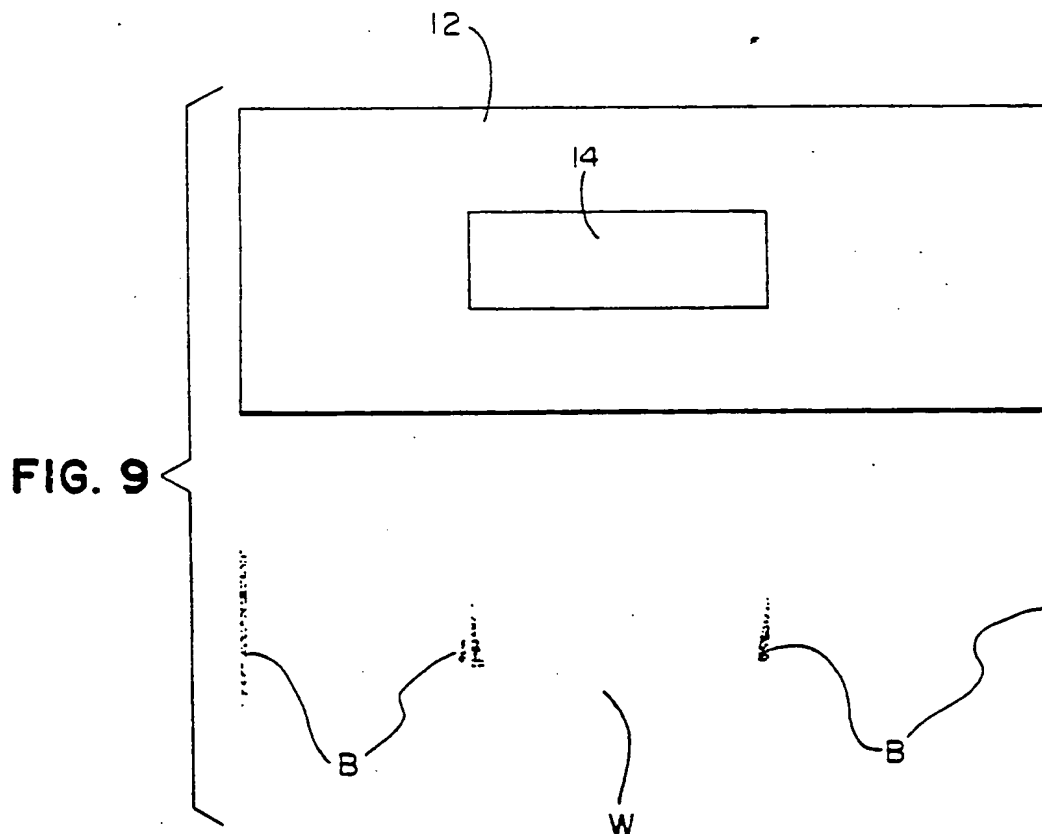


FIG. 9

FROM FIG. 8

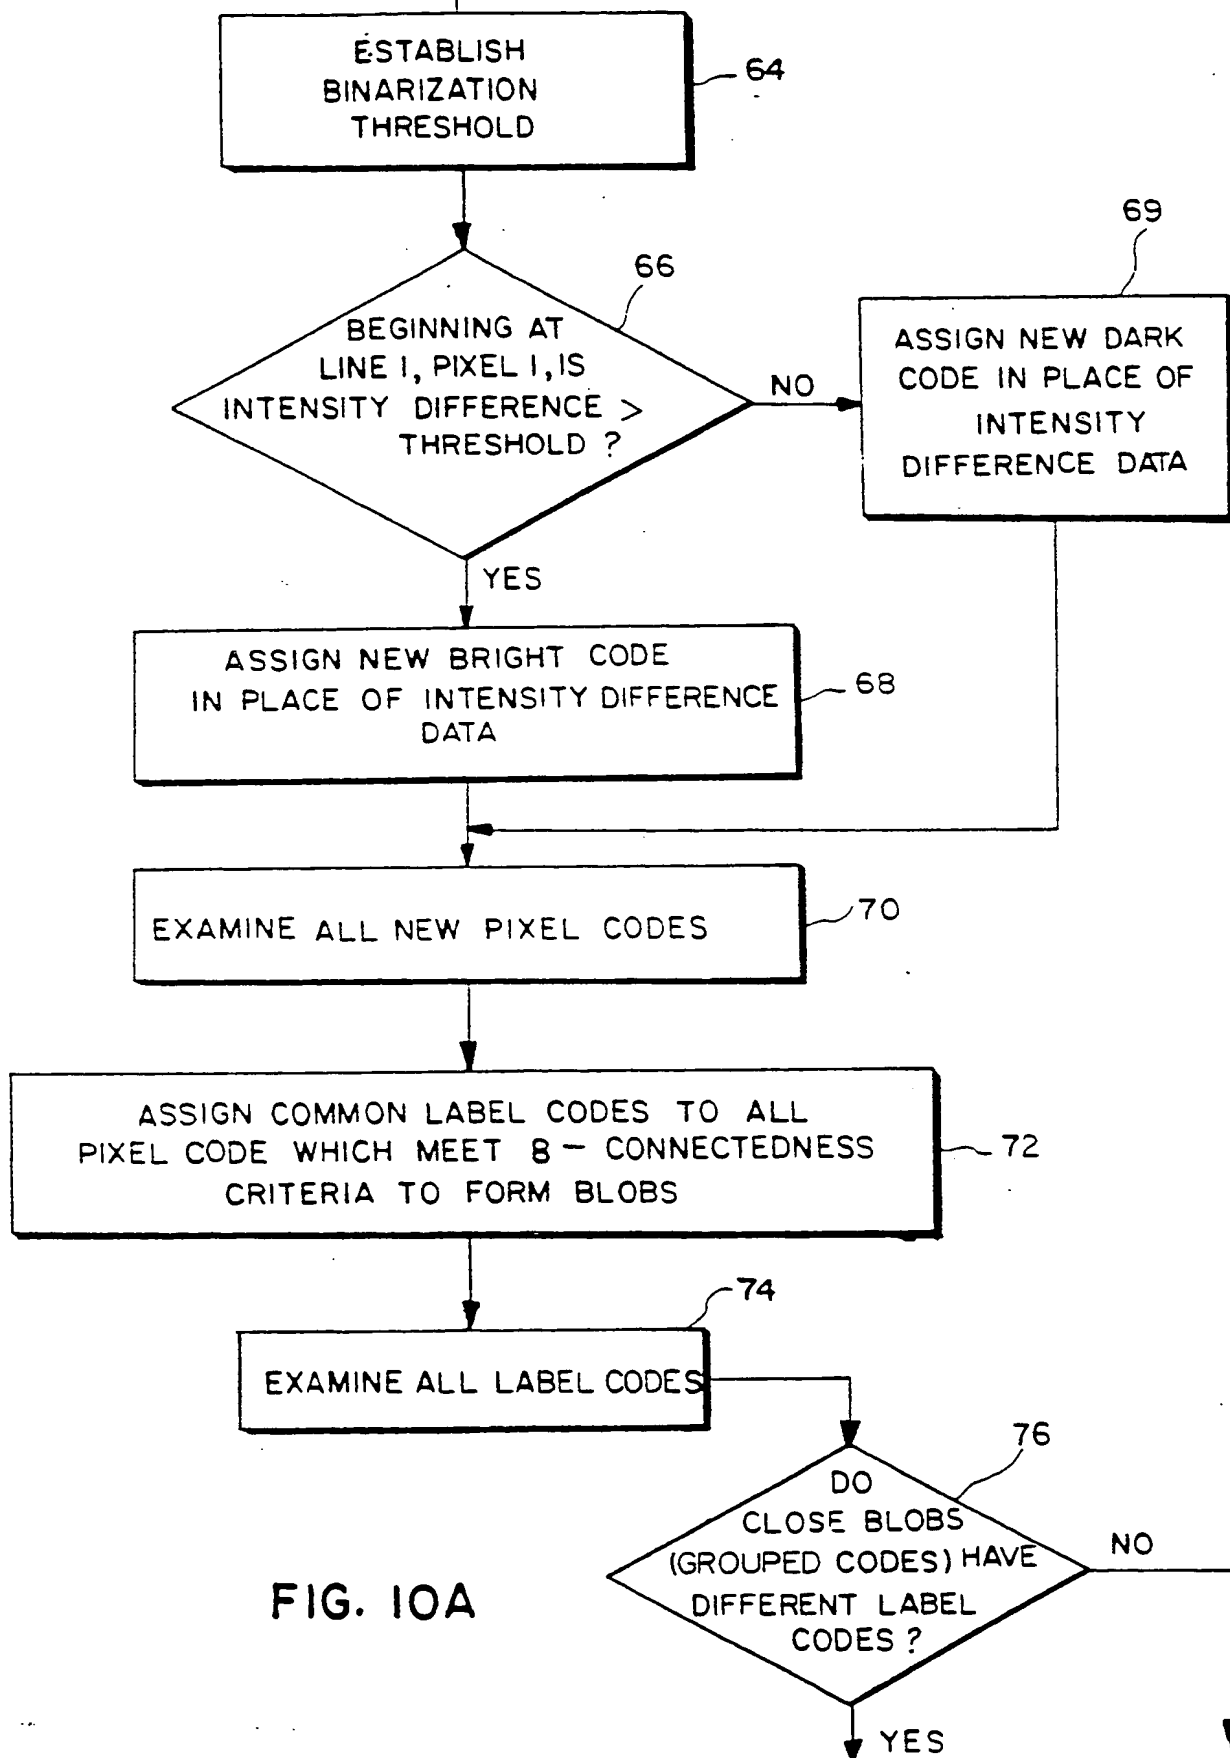

FROM FIG. 10A

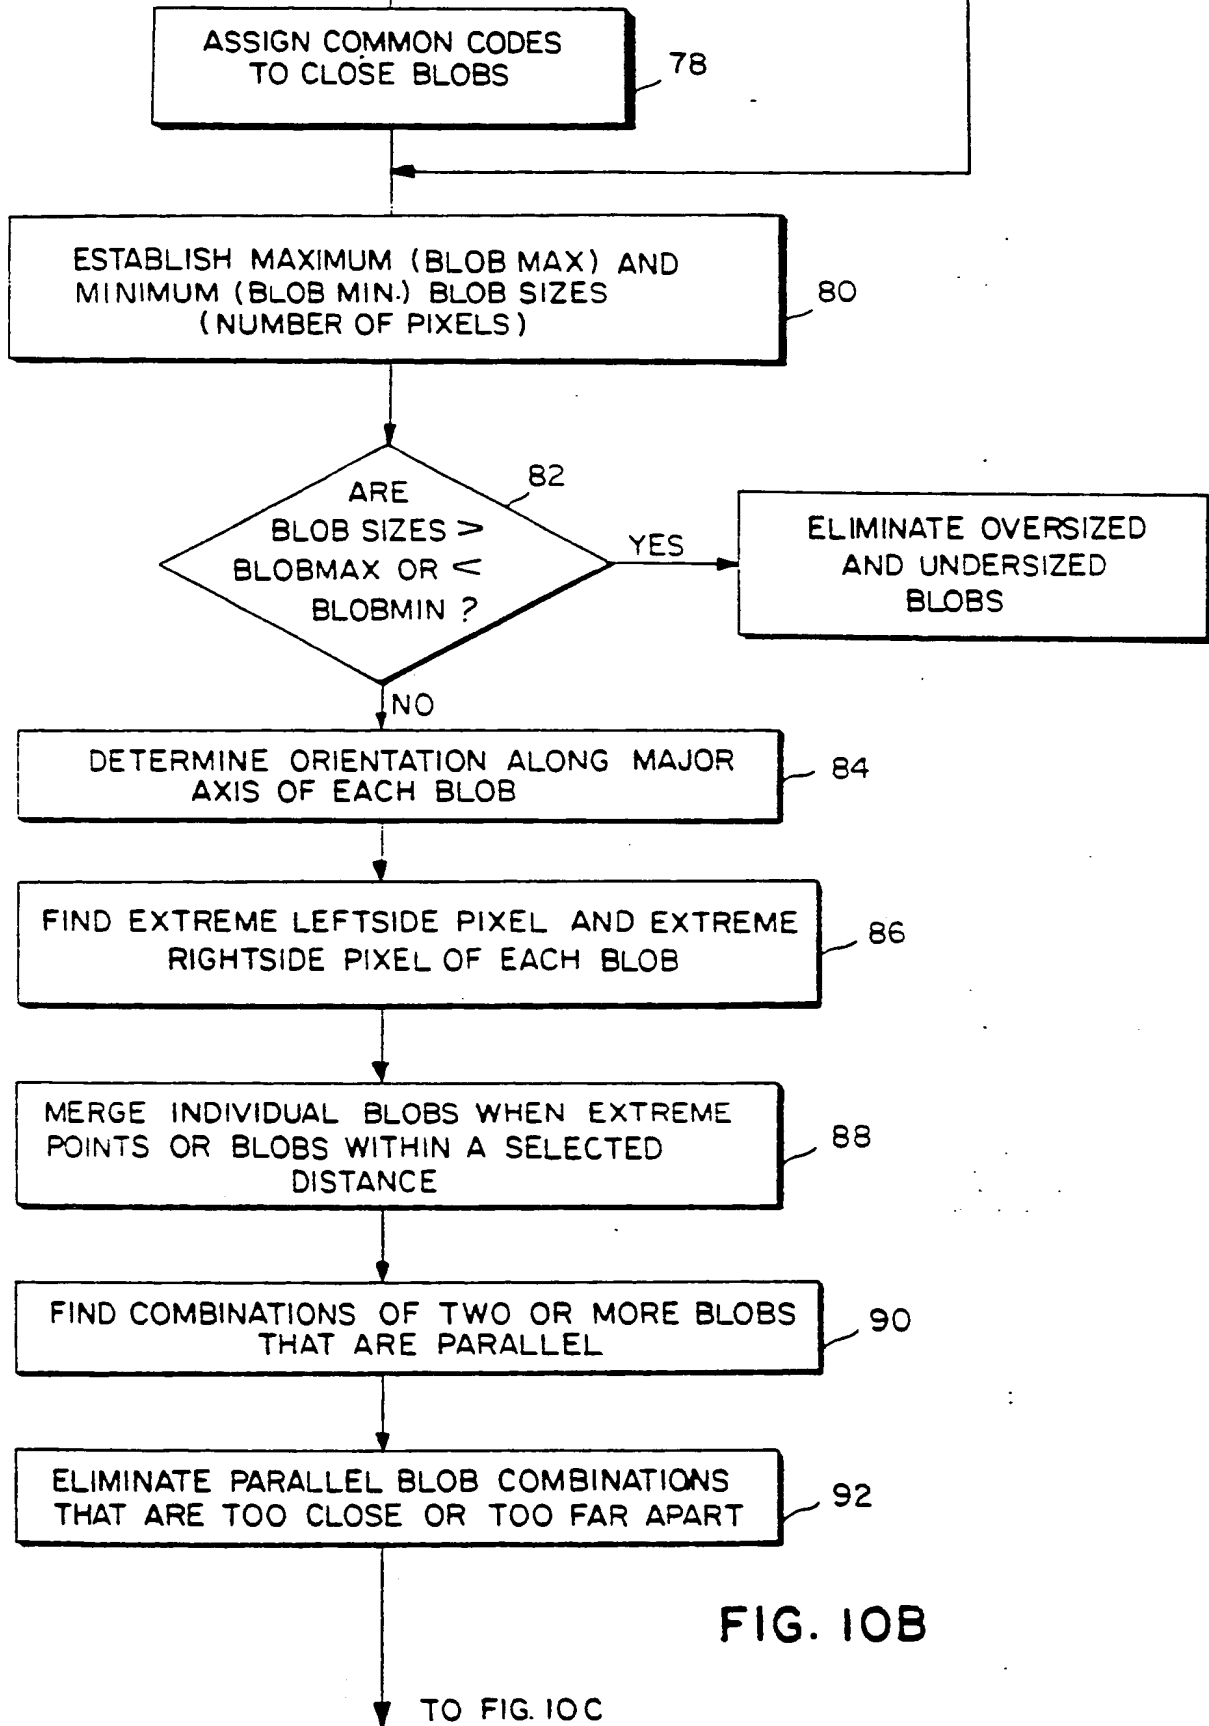


FIG. 10B

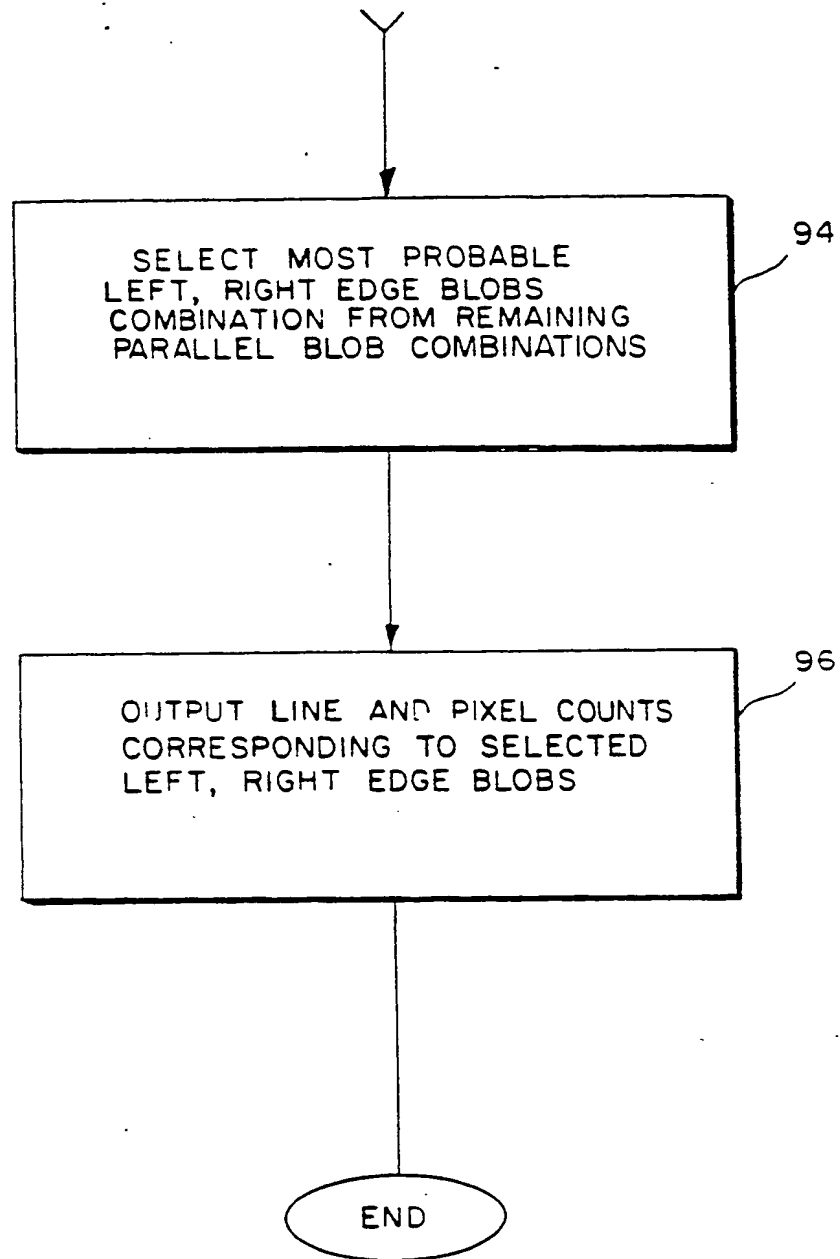


FIG. 10C

(19)



Europäische Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 312 980
A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **88117322.3**(51) Int. Cl.4: **B07C 3/14**(22) Date of filing: **18.10.88**(30) Priority: **20.10.87 US 111004**(43) Date of publication of application:
26.04.89 Bulletin 89/17(64) Designated Contracting States:
DE FR GB IT(88) Date of deferred publication of the search report:
14.02.90 Bulletin 90/07

(71) Applicant: **EASTMAN KODAK COMPANY** (a
New Jersey corporation)
343 State Street
Rochester New York 14650(US)

(72) Inventor: **Radl, Bruce Mathew**
c/o EASTMAN KODAK COMPANY Patent
Department
Rochester New York 14650(US)
Inventor: **Lumia, John Joseph**
c/o EASTMAN KODAK COMPANY Patent
Department
Rochester New York 14650(US)
Inventor: **Gold, Bennett Ira, Dr.**
c/o EASTMAN KODAK COMPANY Patent
Department
Rochester New York 14650(US)


(74) Representative: **Blickle, K. Werner, Dipl.-Ing. et al**
KODAK AKTIENGESELLSCHAFT Postfach
600345
D-7000 Stuttgart-Wangen 60(DE)

(54) **Apparatus for generating edge position signals for use in locating an address element on a mailpiece.**

(57) The edges of address elements such as address labels and window apertures located on a mailpiece, are detected by utilizing illumination from first and second alternating "on" and "off" light sources which illuminate the address elements at an acute angle. In the case of label detection, the edge closest to the on illuminating source generates a high contrast image, while the edge furthest from the "on" illuminating source is shadowed. In the case of illumination of an aperture, the opposite is true. That is, the light reflected from the edge which is furthest from illuminating source is high contrast, while edge closest to the illuminating source has a lower contrast. When the images generated due to edge illumination by the left and right light sources are subtracted from each other, the edges are further en-

hanced due to the fact that the remaining portions of the images cancel each other out.

EP 0 312 980 A3

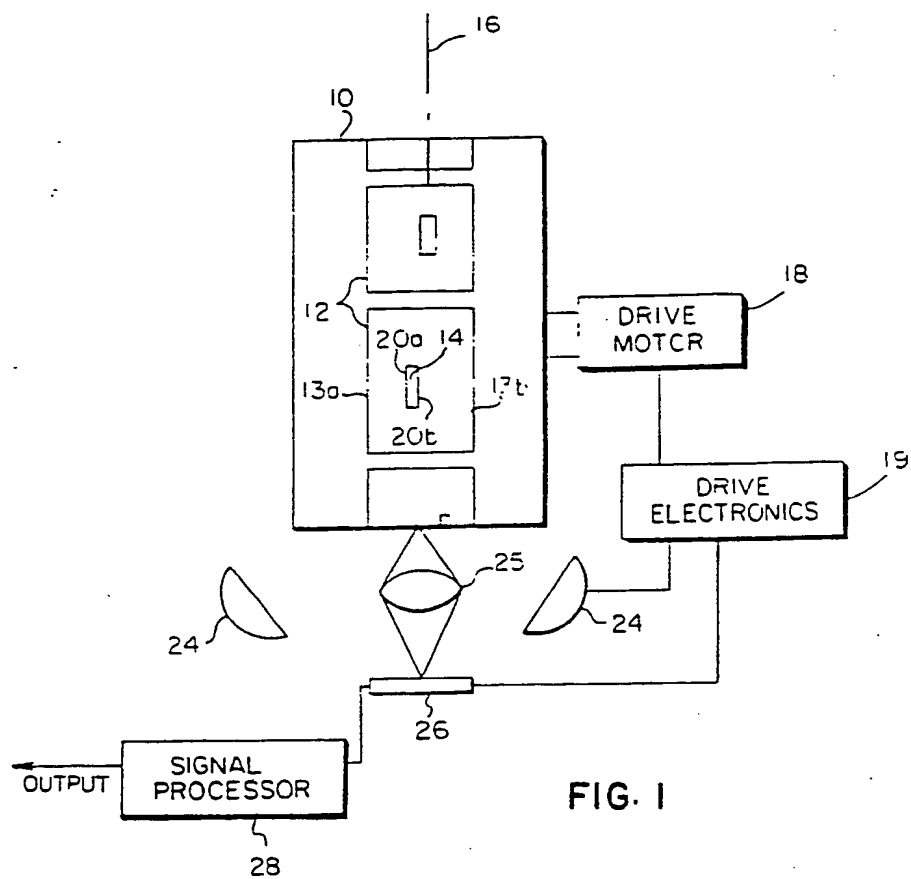



EP 88 11 7322

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
A	EP-A-0 134 996 (K.K. TOSHIBA) * Abstract; pages 1-3, line 22; claims 1,3-5 *	1,4,6-8	B 07 C 3/14
A	--- PATENT ABSTRACTS OF JAPAN, vol. 7, no. 286 (P-244)[1431], 21st December 1983; & JP-A-58 161 085 (MATSUSHITA DENKI SANGYO K.K.) 24-09-1983 * Abstract *	1,4,6,8	
A	--- US-A-3 780 310 (HUDLER) * Abstract; figure 1; columns 1-2, line 60; claim 1 *	1,4,6-8	
A,D	--- US-A-3 890 509 (MAXEY) * Abstract; columns 1-2, line 5; claims 1-9; figure 3 *	1,4,6-8	
A	--- EP-A-0 085 567 (NIPPON ELECTRIC CO.) * Abstract; pages 1-4, line 15; claims 1-4 *	1,2,4,6	
A	--- GB-A-2 022 817 (HUDLER) * Abstract; page 1, lines 5-109; claims 1-2 *	1,4,6,8	

The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 17-11-1989	Examiner BEAUCE G.Y.G.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	

EPO FORM 1503 01.82 (P0401)

This Page Blank (uspto)